

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 775 496 A1

(12)

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:

28.05.1997 Bulletin 1997/22

(21) Application number: 96921132.5

(22) Date of filing: 01.07.1996

(51) Int. Cl.⁶: A61K 47/40

(86) International application number:

PCT/JP96/01815

(87) International publication number:

WO 97/01356 (16.01.1997 Gazette 1997/04)

(84) Designated Contracting States:

DE ES FR GB IT NL

(30) Priority: 29.06.1995 JP 186154/95

30.11.1995 JP 337870/95

(71) Applicant: SHISEIDO COMPANY LIMITED

Chuo-ku Tokyo 104-10 (JP)

(72) Inventors:

• HAMANO, Yohei

Kohoku-ku Yokohama-shi Kanagawa 223 (JP)

• NASU, Akio

Kohoku-ku Yokohama-shi Kanagawa 223 (JP)

• MINAMI, Takashi

Kohoku-ku Yokohama-shi Kanagawa 223 (JP)

• MIYAZAKI, Takayuki

Kohoku-ku Yokohama-shi Kanagawa 223 (JP)

• TOMITA, Noriko

Kohoku-ku Yokohama-shi Kanagawa 223 (JP)

• MATSUMOTO, Takashi

Kohoku-ku Yokohama-shi Kanagawa 223 (JP)

• SOYAMA, Yoshikazu

Kohoku-ku Yokohama-shi Kanagawa 223 (JP)

• ITO, Kenzo

Kohoku-ku Yokohama-shi Kanagawa 223 (JP)

• MATSUDA, Hajime

Kohoku-ku Yokohama-shi Kanagawa 223 (JP)

• SUMIYOSHI, Hideyuki

Shizuoka 417 (JP)

(74) Representative: Perry, Robert Edward et al

GILL JENNINGS & EVERY

Broadgate House


7 Eldon Street

London EC2M 7LH (GB)

(54) CHOLESTEROL ESTER CLATHRATE, WATER-HOLDING COMPOSITION, HYDROUS COMPOSITIONS, COSMETICS CONTAINING THE SAME, AND PROCESSES FOR THE PREPARATION THEREOF

(57) A cholesterol ester clathrate comprising a cholesterol ester included in a hydroxyalkylated cyclodextrin; a hydrous composition comprising a hydroxyalkylated cyclodextrin, a cholesterol ester and water; a hydrous composition comprising a hydroxyalkylated cyclodextrin, a cholesterol ester, a hydrous stabilizer, and water; a hydrous composition comprising a hydroxyalkylated cyclodextrin, a cholesterol ester, a clay mineral, and water; cosmetics containing these hydrous compositions; and processes for the preparation thereof. The clathrate exhibits an emulsifying effect in itself. Further, the hydrous compositions are excellent in water-holding capacity and are improved in hydration properties and the resistance to separation at high temperatures.

FIG. 1

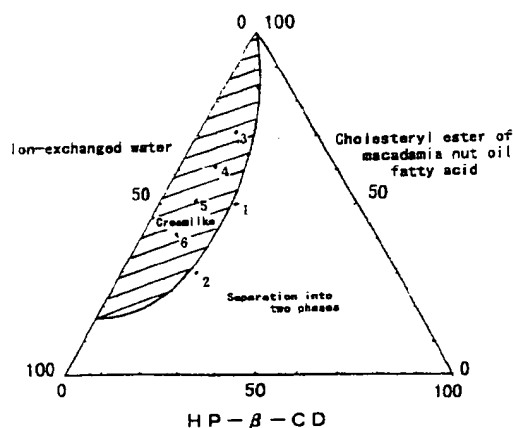

EP 0 775 496 A1

Description

[TECHNICAL FIELD]

5 The present invention relates to cholesterol ester clathrate and hydrous composition comprising thereof and more particular, relates to the improvement of the stability in hydrating and emulsifying said hydrous composition.

[BACKGROUND ART]

10 Water-holding in skin is an essential factor for keeping the skin in good condition. So, a lot of cosmetics and pharmaceutical preparations which intend the moisturizing are sold in the market, and a lot of humectants are developed. Among of these, a hydrous oily component, e.g., cholesterol ester which is excellent in hydration property and moisturizing property, are used in particularly cosmetics.

15 However, in case of compounding such a hydrous oily component which was included a lot of water to the cosmetics, it had some problems in stability, since water was separated at a high temperature or temperature change with the passage of time.

Therefore, for keeping the stability of the cosmetics which comprising oil and water, various surfactants has been used in separately or by combining two or more as an emulsifier.

20 However, ionic surfactants such as alkyl sulfate and higher fatty acid salt has an apprehension of skin irritation, in the case where they are used at high concentration. And in case of using nonionic surfactants such as polyoxyethylene type, it has a problem in solubility such that nonionic surfactants inactivate an antiseptic such as paraben.

In order to solve these problems, it has been developed techniques which uses cyclodextrin or its derivatives as an emulsifier. Namely, Japanese Unexamined Patent Publication No. Sho 58-58139 discloses the technique of emulsification by the specific process that cyclodextrin is used by combination with oil soluble surfactant. Also, Japanese Unexamined Patent Publication No. Sho 63-194726 discloses the technique which is used methylated β -cyclodextrin as an assistant emulsifier.

25 However, the problems such as skin irritation has not solved completely, since conventional surfactants are used by combining in these techniques.

30 In order to solve these problems, as for the example which is obtained the emulsion cosmetics without using any surfactant, the content in Japanese Unexamined Patent Publication No. Hei 3-284611 is listed. Namely, in Japanese Unexamined Patent Publication No. Hei 3-284611, the emulsion cosmetics which comprising a hydroxyalkylated cyclodextrin, oil and water is mentioned. This emulsion cosmetics is rich in solubility and excellent in stability and safety.

However, such a cosmetics is still insufficient in the water-holding capacity for keeping the moisture, so it is desired the further improvement.

35 Thereupon, it has been developed the techniques used a hydroxyalkylated cyclodextrin which is effectively functioned to the composition as a hydrous stabilizer at the same time as an emulsifier.

40 However, in the water-holding of lipstick, and the like by using these techniques, the water-holding under the severe conditions such that is left for a long period of time and at 90°C in the preparation time, is still insufficient. It sometimes occurs the aggregation of coloring agent and separate into a water phase and an oil phase or an emulsion phase, it is desired the further improvement.

[DISCLOSURE OF INVENTION]

45 In view of the above-mentioned problems of the prior art, the object of the present invention is to provide a cholesterol clathrate which has an excellent stability, safety and high water-holding capacity for keeping the moisture, and has an emulsifying effect in itself, and is to provide a hydrous composition which has an excellent stability, safety and high hydrous capacity for keeping the moisture, and has extremely excellent effect which is not separated even under the severe condition such as high temperature.

50 As the result of diligent studies of the inventors for attaining the above-mentioned object, it has been found that cholesterol ester clathrate comprising a cholesterol ester included in a hydroxyalkylated cyclodextrin can be functioned as an excellent emulsifier by hydrophilic nature of cyclodextrin and lipophilic nature of cholesterol ester. And, in case of compounding the composition which comprising said cholesterol clathrate and water into the cosmetics and the like, it also has been found that the cosmetics which is excellent in stability and safety, and has the specific property which is rich in water-holding capacity for keeping the moisture can be obtained. Further, it also has been found that the compositions which comprising a hydroxyalkylated cyclodextrin, water, and a hydrous stabilizer has extremely high hydration properties, and the compositions which comprising a hydroxyalkylated cyclodextrin, a cholesterol ester, water, and a clay mineral can be improved the separation stability at high temperature. Accordingly, the present invention has been accomplished.

Namely, in a first aspect of the present invention, there is provided a cholesterol ester clathrate comprising a cho-

lesterol ester included in a hydroxyalkylated cyclodextrin.

In a second aspect of the present invention, there is provided a hydrous composition comprising a hydroxyalkylated cyclodextrin, a cholesterol ester and water.

In said hydrous composition, preferably, the hydrous composition is composed of water and the cholesterol ester clathrate which is formed by the hydroxyalkylated cyclodextrin and the cholesterol ester.

Also, in said hydrous composition, preferably, said composition comprises 5 to 30% by weight of the hydroxyalkylated cyclodextrin, 5 to 80% by weight of the cholesterol ester, and 5 to 60% by weight of water.

Further, in said hydrous composition, preferably, the ratio of the compounding amount of the hydroxyalkylated cyclodextrin and the cholesterol ester is existed within the range represented by the slant line of the triangular diagram shown in Figure 1.

In a third aspect of the present invention, there is provided a hydrous composition comprising a hydroxyalkylated cyclodextrin, water, and one or more of a hydrous stabilizer which is/are selected from the group such as alkylated polysiloxane polyethyleneglycol copolymer, alkyl silicated anhydrous silicate, alkyl-modified silicone resin coated powder, glyceryl-modified silicone resin coated powder, dextrin fatty acid ester.

In said hydrous composition, preferably, said hydrous composition further comprising a hydrous oily component.

Also, in said hydrous composition, preferably, said composition comprises 5 to 30% by weight of the hydroxyalkylated cyclodextrin, 5 to 60% by weight of water and 5 to 80% by weight of the hydrous oily component with respect to the whole amount of the hydrous composition.

Further, in said hydrous composition, preferably, the ratio of the compounding amount of the hydroxyalkylated cyclodextrin, water and the hydrous oily component is existed within the range represented by the slant line of the triangular diagram shown in Figure 2.

In said hydrous composition, it is preferable to comprise 0.01 to 20% by weight of the hydrous stabilizer with respect to the whole amount of the hydrous composition.

Preferably, alkylated polysiloxane polyethyleneglycol copolymer is used as the hydrous stabilizer.

In a fourth aspect of the present invention, there is provided a hydrous composition which comprising a hydroxyalkylated cyclodextrin, a cholesterol ester, a clay mineral and water.

In said hydrous composition, preferably, said composition comprises 5 to 30% by weight of the hydroxyalkylated cyclodextrin, 5 to 80% by weight of the cholesterol ester, 0.01 to 20% by weight of the clay mineral, and 5 to 60% by weight of water with respect to the whole amount of the hydrous composition.

In said hydrous composition, preferably, the clay mineral is a swelling type clay mineral or an organophilic smectite, and in particular, synthetic sodium magnesium silicate is most preferable.

Further, in said hydrous composition, preferably, said composition further comprising hydrophobic silica.

In said hydrous composition, preferably, said composition comprises 0.01 to 20% by weight of hydrophobic silica with respect to the whole amount of the hydrous composition.

Also, in said hydrous composition, preferably, the ratio of the compounding amount of hydrophobic silica to the clay mineral is 2 : 1 to 1 : 4.

In a fifth aspect of the present invention, there is provided a cosmetics comprising a hydroxyalkylated cyclodextrin, a cholesterol ester and water.

In said cosmetics, preferably, a hydroxyalkylated cyclodextrin, a cholesterol ester and water are compounded as any one of said hydrous composition.

And, in said cosmetics, preferably, the emulsion type of the cosmetics is water-in-oil type.

Also, in said cosmetics, preferably, any one of said hydrous composition is compounded with 0.5 to 30% by weight with respect to the whole amount of the cosmetics.

In a sixth aspect of the present invention, there is provided a process for the preparation of a cholesterol ester clathrate which is obtained by stirring and mixing a hydroxyalkylated cyclodextrin and a cholesterol ester.

In a seventh aspect of the present invention, there is provided a process for the preparation of a hydrous composition which is obtained by stirring and mixing a hydroxyalkylated cyclodextrin, water, and, a cholesterol ester.

A process for the preparation of a hydrous composition which is obtained by stirring and mixing the cholesterol ester clathrate which is prepared by the process for the preparation of the hydrous composition, and water.

In said process for the preparation of the hydrous composition, preferably, 5 to 30% by weight of the hydroxyalkylated cyclodextrin, 5 to 80% by weight of the cholesterol ester, 5 to 60% by weight of water are compounded.

In said process for the preparation of the hydrous composition, preferably, the ratio of the compounding amount of the hydroxyalkylated cyclodextrin and the cholesterol ester is existed within the range represented by the slant line of the triangular diagram shown in Figure 1.

In a eighth aspect of the present invention, there is provided a process for the preparation of the hydrous composition which is obtained by stirring and mixing a hydroxyalkylated cyclodextrin; water; one or more of a hydrous stabilizer which is/are selected from the group such as alkylated polysiloxane polyethyleneglycol copolymer, alkyl silicated anhydrous silicate, alkyl-modified silicone resin coated powder, glyceryl-modified silicone resin coated powder and dextrin fatty acid ester; and a hydrous oily component.

In said process for the preparation of the hydrous composition, preferably, 5 to 30% by weight of the hydroxy-alkylated cyclodextrin, 5 to 60% by weight of water, and 5 to 80% by weight of the hydrous oily component are compounded with respect to the whole amount of the hydrous composition.

In said process for the preparation of the hydrous composition, preferably, the ratio of the compounding amount of the hydroxyalkylated cyclodextrin, water, and the hydrous oily component is existed within the range represented by the slant line of the triangular diagram shown in Figure 1.

In said process for the preparation of the hydrous composition, preferably, 0.01 to 20% by weight of the hydrous stabilizer is compounded with respect to the whole amount of the hydrous composition.

Preferably, alkylated polysiloxane polyethyleneglycol copolymer is used as the hydrous stabilizer.

In a ninth aspect of the present invention, there is provided a process for the preparation of the hydrous composition which is obtained by stirring and mixing a hydroxyalkylated cyclodextrin, a cholesterol ester, a clay mineral, and water.

In said process for the preparation of the hydrous composition, preferably, 5 to 30% by weight of the hydroxy alkylated cyclodextrin, 5 to 80% by weight of the cholesterol ester, 0.01 to 20% by weight of the clay mineral, and 5 to 60% by weight of water are compounded with respect to the whole amount of the hydrous composition.

Also, in said process for the preparation of the hydrous composition, the clay mineral is a swelling type clay mineral or an organophilic smectite, and in particular, synthetic sodium magnesium silicate is most preferable.

Further, in said process for the preparation of the hydrous composition, preferably, the hydrous composition is obtained by compounding hydrophobic silica, and stirring and mixing it.

In said process for the preparation of the hydrous composition, preferably, 0.01 to 20% by weight of hydrophobic silica is compounded.

Also, in said process for the preparation of the hydrous composition, preferably, the ratio of the compounding amount of hydrophobic silica to the clay mineral is 2 : 1 to 1 : 4.

In a tenth aspect of the present invention, there is provided a process for the preparation of the cosmetics which is obtained by stirring and mixing the hydrous composition which is prepared by any one of said process for the preparation of the hydrous composition and other ingredients.

In said process for the preparation of the cosmetics, preferably, 0.5 to 30% by weight of the hydrous composition which is prepared by any one of said process for the preparation of the hydrous composition, is compounded with respect to the whole amount of the cosmetics.

In the following, the constitutions of the present invention will be explained in further detail.

(Constituents)

Hydroxyalkylated Cyclodextrin

A hydroxyalkylated cyclodextrin (hereinafter, referred to as HACD) used in the present invention is the preparation which includes a hydroxyalkyl group into a hydroxyl group of cyclodextrin (hereinafter, referred to as CD) which is well known as cyclic oligosaccharide in conventional. Namely, the preparation includes the hydroxyalkyl group which has hydrophobic nature, into the hydroxyl group of CD, and thereby its hydrophobic nature is enlarged.

The CD is oligosaccharide that a glucose residue is linked cyclically by α -1, 4-linkage, and α -CD, β -CD, and γ -CD which is comprised of a glucose residue of 6, 7, and 8 respectively are known in general. In the present invention, one or more of these CD can use by selecting.

As for the hydroxyalkyl group which substitute for the hydroxyl group of CD, a hydroxyethyl group, a hydroxypropyl group and the like are mainly used. The HACD can be obtained by doing substitution reaction of these hydroxyalkyl groups and the hydroxyl group. Examples of the HACD include hydroxyethylated cyclodextrin, hydroxypropylated cyclodextrin, hydroxybutylated cyclodextrin, dihydroxypropylated cyclodextrin and the like.

The preferable degree of substitution of a hydroxyl group and a hydroxyalkyl group in the present invention is 1 to 14 per CD.

Among of these HACD, in considering the price, easiness of preparation, usability, and water solubility, hydroxyethyl β -CD or hydroxypropyl β -CD is preferable. However, the HACD of the present invention is not limited to these.

The process for the preparation of the HACD is known several process in conventional, it will be shown one example in the following.

Namely, dissolved 100g of β -CD into 150ml of 20% NaOH water solution, and gradually dropped 50ml of propylene oxide under keeping at 30°C, and then the reaction was keeping under stirring 20 hours. After the end of the reaction, neutralized it pH 6.0 by hydrochloric acid and put it into permeable membrane tube, and then it was desalted under flowing water in 24 hours. After then, dry it by freezing drying machine, and about 90g of hydroxypropyl β -CD was obtained. The degree of substitution of this hydroxypropyl β -CD per CD was 5.1.

Hydrous Oily Component

Examples of a hydrous oily component used in the present invention include a cholesterol ester.

Examples of the cholesterol ester as the hydrous oily component of the present invention include cholesterol and esters of higher fatty acid. As for the higher fatty acids, straight chain or branched chain fatty acid having a carbon number from 12 to 24 can be used, e.g., myristic acid, palmitic acid, palmitoleic acid, stearic acid, oleic acid, linoleic acid, linolenic acid, arachidic acid and the like are included. In the present invention, it is used by selecting from one or more of these higher fatty acids. As for the higher fatty acid which constitute the ester with cholesterol used in the present invention, stearic acid, oleic acid, palmitoleic acid, macadamia nut oil fatty acid are particularly preferable.

As for the cholesterol esters used in the present invention, cholesterol stearate, cholesterol oleate, cholesterol palmitate, cholesteryl ester of macadamia nut oil fatty acid are particularly preferable.

Hydrous Stabilizer

In the present invention, examples of a hydrous stabilizer include alkylated polysiloxane polyethyleneglycol copolymer, alkyl silicated anhydrous silicate, alkyl-modified silicone resin coated powder, glyceryl-modified silicone resin coated powder, dextrin fatty acid ester, and it is used by selecting one or more of these. All of these substances are low in both hydrophilic nature and lipophilic nature, it is thinkable that they may be existed on the boundary of water and oily component in membranous state. Among of these, in order to control the water evaporation rate in low, in particular, it is preferable to use alkylated polysiloxane polyethyleneglycol copolymer.

Clay Mineral

As for a clay mineral used in the present invention, a swelling type clay mineral and an organophilic smectite are exemplified. Examples of the swelling type clay mineral preferably used in the present invention include, e.g., synthetic sodium magnesium silicate, lithium tenorite, sodium tetra silicate mica, lithium hectorite, and the like. As compared with that a conventional non-swelling type clay mineral such as natural mica is not swelled, these swelling type clay minerals have hydrous swelling property that the clay mineral is swelled up in the case where water molecule is added to the middle of the crystal layer.

As for the organophilic smectite preferably used in the present invention, dimethyl stearyl ammonium hectorite, aluminium magnesium silicate processed with distearyldimethyl ammonium chloride, and the like are listed.

Among of these clay minerals, it is preferable to use particularly synthetic sodium magnesium silicate of the swelling type clay mineral, for the improvement of the separation stability at a high temperature.

(Hydrous Composition)(1) Cholesterol Ester Clathrate and Hydrous Composition Comprising Thereof

A cholesterol ester clathrate of the present invention is formed by stirring and mixing a HACD and a cholesterol ester.

A hydrous composition of the present invention comprising a cholesterol ester clathrate and water.

The hydrous composition can be obtained by stirring and mixing a cholesterol ester clathrate and water. In said hydrous composition, a cholesterol ester clathrate forms micelle constitution and holds the water content. Said hydrous composition also can be obtained by stirring and mixing a HACD, a cholesterol ester and water. Figure 1 shows the triangular diagram of the result of water retention test, by using HP- β -CD as a HACD and cholesteryl ester of macadamia nut oil fatty acid as the cholesterol ester. In 1 and 2 of the triangular diagram, the composition is separated into two phases, and the favorable cholesterol ester clathrate cannot be obtained. On the other hand, in 3 to 6 of the triangular diagram, the compositions become creamlike and the stable hydrous compositions are obtained. Accordingly, as for the hydrous composition of the present invention, preferably, the ratio of the amount of HP- β -CD and cholesteryl ester of macadamia nut oil fatty acid is existed within the range which is represented by the slant line of Figure 1.

(2) Hydrous Composition Comprising a Hydrous Stabilizer

A hydrous composition comprising a hydrous stabilizer of the present invention is composed of a HACD, water and a hydrous stabilizer, and further can be comprised of a hydrous oily component as additional ingredient.

In a hydrous composition of the present invention, preferably, 5 to 30% by weight of the HACD, 5 to 60% by weight of water, and 5 to 80% by weight of the hydrous oily component are compounded with respect to the whole amount of the hydrous composition. Further, preferably, the ratio of the compounding amount of the HACD, water, and the hydrous oily component is existed within the range of the triangular diagram shown in Figure 2. In the case where the ratio of

the compounding amount is not existed within the range, it is difficult to obtain the expected composition, since the separation is occurred in the middle of a water phase and an emulsion phase.

Said hydrous composition can be obtained by dispersing the hydrous stabilizer into the hydrous oily component, adding and stirring the HACD in water solution to this, and adding and further stirring the rest of water to it.

(3) Hydrous Composition Comprising a Clay Mineral

A hydrous composition comprising a clay mineral of the present invention is composed of a HACD, a cholesterol ester, a clay mineral, and water.

In a hydrous composition of the present invention, preferably, 5 to 30% by weight of the HACD, 5 to 80% by weight of the cholesterol ester, 0.01 to 20% by weight of the clay mineral, and 5 to 60% by weight of water are compounded with respect to the whole amount of the hydrous composition. In the case where the compounding amount is not within said range, the preferable emulsion phase cannot be formed. In the case where the compounding amount of the clay mineral is not within said range, the improvement of the separation stability at high temperature become insufficient.

Further, in the case where hydrophobic silica is compounded into said hydrous composition, by compounding just a small amount of the clay mineral, the hydrous composition which is improved the separation stability can be obtained. In particular, hydrophobic silica is preferably compounded within the range of 0.01 to 20% by weight, and the ratio of the compounding amount of hydrophobic silica to the clay mineral is preferably 2 : 1 to 1 : 4.

Said hydrous composition can be obtained by dispersing the clay mineral into the cholesterol ester and gradually adding and stirring the HACD in water solution to this, and adding and further stirring the rest of water.

And, said each hydrous composition, except for said essential and selected ingredients, can be compounded the ingredients e.g., oily components such as squalane; humectants such as glycerin; wax such as candelilla wax; high polymers such as polyglyceride; medicaments such as glycyrrhizinic acid; natural surfactants such as recinol, and the like.

(Cosmetics Comprising a Hydrous Composition)

In the cosmetics of the present invention, it is possible to obtain the cosmetics which is rich in stability and safety, and is excellent in water-holding capacity, by compounding said various hydrous compositions. Also, the emulsion type of said hydrous composition is preferably water-in-oil type, and in particular, it is preferable to use said hydrous composition as a water-in-oil cosmetics.

In this case, it is necessary to compound the hydrous composition of the present invention within the degree that the effects of said hydrous composition are sufficiently exhibited. The preferable compounding amount of said hydrous composition is 0.5 to 30% by weight with respect to the whole amount of the cosmetics.

The cosmetics in accordance with the present invention are prepared by normal techniques except for compounding the various hydrous composition of the present invention which was prepared in advance.

The cosmetics in accordance with the present invention, in addition to the hydrous composition of the present invention, can be compounded the various ingredients which is normally used for cosmetics within the degree that the effects of said hydrous composition of the present invention are not spoiled. Examples of said various ingredients are listed fats and oils of natural animals and vegetables such as macadamia nut oil, evening primrose oil, castor oil, olive oil, mink oil, jojoba oil, lanolin, squalene and the like; wax such as liquid paraffin, paraffin wax, polyethylene wax, carnauba wax and the like; higher alcohols such as cetyl alcohol, isocetyl alcohol, stearyl alcohol, isostearyl alcohol and the like; higher fatty acids such as myristic acid, palmitic acid, stearic acid, behenic acid, isostearic acid and the like; esters such as isopropyl myristate, isopropyl palmitate, isopropyl isostearate, diisostearyl malate, trimethylolpropane triisostearate, glyceryl isostearate, neopentyl glycol dicaprate, glyceryl 2-ethylhexanoate, and the like; other oily components such as polar oils (e.g., diethylene glycol monopropylene pentaerythritol ether, ethyl linoleate, polyoxypropylene butyl ether, and the like), silicone oils and the like; soluble powder bases such as D-mannitol, lactose and the like; humectants such as glycerin, hyaluronic acid and the like; medicaments such as vitamin C, vitamin E and the like; antiphlogistic; UV-absorber; UV-screening agent; antioxidant; antiseptic; viscosity modifier; coloring matters; crude drugs; perfume ingredient; pigment, and the like.

The cosmetics in accordance with the present invention can be formed the configuration which corresponds to the various use application, e.g., creamlike, milky lotionlike, liquidlike, solidlike, sticklike, pencillike, and the like. In the case where the cosmetics are formed the configuration that is particular compounded a large amounts of oil phase ingredients such as wax of solidlike, sticklike, pencillike and the like, and that is almost never possessed water phase ingredients, the water-holding capacity of the cosmetics can be effectively exhibited.

As for the cosmetic which uses the hydrous composition of the present invention, the composition for lipstick comprising a large amounts of oil phase ingredients particular such as wax is preferable.

[BRIEF DESCRIPTION OF THE DRAWINGS]

Figure 1 is a triangular diagram which shows the ratio of the compounding amount of a HACD, a cholesterol ester and water.

Figure 2 is a triangular diagram which shows the ratio of the compounding amount of a HACD, a cholesterol ester, and water, in case of compounding 0.02% of a hydrous stabilizer.

Figure 3 are microphotographs which shows the hydration properties of Example 1-1 and Comparative example 1-1.

Figure 4 are microphotographs which shows the hydration properties in the after case where Example 1-1 and Comparative example 1-1 were left for 24 hours.

Figure 5 are spectrum views of DSC measurement in Example 1-1 and Comparative example 1-1.

Figure 6 is a chart comparing the water content of keratin in Example 1-5, Example 1-6, and Comparative example 1-3.

Figure 7 is a chart comparing the penetrating amount of the water content in Example 1-6, Comparative example 1-3, and Comparative example 1-4.

Figure 8 are spectrum views of DSC measurement in Comparative example 2-1 to 2-3.

Figure 9 are spectrum views of DSC measurement in Example 2-1 and 2-2.

Figure 10 is the results of the measurements of water evaporation rate which was performed by using Example 2-1 and Example 2-2.

Figure 11 are microphotographs which shows the hydration properties of Example 2-3 and Comparative example 2-5.

Figure 12 are spectrum views of DSC measurement in Example 2-3 and Comparative example 2-5.

Figure 13 are spectrum views of DSC measurement in Example 3-1, Comparative example 3-1 and 3-2.

Figure 14 are microphotographs which shows the hydrous composition of Example 3-33 to 3-37 and Example 3-39.

Figure 15 is the results of the measurements of water evaporation rate which was performed by using the hydrous compositions of Example 3-33 to 3-39.

[BEST MODE FOR CARRYING OUT THE INVENTION]

In the following, it will be explained the present invention in further detail from the embodiments of the present invention. However, the present invention should not be limited to the following embodiments. Also, the compounding amount is expressed as parts by weight unless otherwise stated.

(1) Cholesterol Ester Clathrate and Hydrous Composition Comprising Thereof

In first, the inventors were studied about the physical properties of the cholesterol ester clathrate of the present invention. Namely, preparing the hydrous composition which comprising water and the cholesterol clathrate which included cholesteryl ester of macadamia nut oil fatty acid in hydroxypropyl β -CD (hereinafter referred to as HP- β -CD) under the following formulation. And, said composition was taken on the preparation and was observed by microscope.

The photographs and the results obtained by the microscope observation were shown in Figure 3 and Table-1 respectively.

Table-1

	Example 1-1	Comp. ex. 1-1
Ion-exchanged water	40	40
HP- β -CD	10	0
cholesteryl ester of macadamia nut oil fatty acid	50	60
Diameter of emulsion particle (μ m)	1 to 5	1 to 10
Form of the composition	had a viscoelasticity	crumbly

As is clear from the above-described results, the hydrous composition had a viscoelasticity, and its emulsion particle was small and also was formed nearly spherical in Example 1-1. On the other hand, in comparative example 1-1, the composition itself showed crumbly feeling and the emulsion particle was crooked shape and was big.

Further, the microphotographs of the composition in Example 1-1 and Comparative example 1-1 which were left for

24 hours, are shown in Figure 4.

As is clear from the above-described results, in Comparative example 1-1, the diameter of emulsion particle became considerable big, so it cannot say that the emulsification was performed in stable. On the other hand, in Example 1-1, the diameter of emulsion particle was considerable small and the particle kept the state of spherical shape, so it can say that the emulsification was performed in stable.

Further, the inventors were performed the DSC measurement in Example 1-1 and Comparative example 1-1 under the following condition.

[DSC Measurement]

Measuring instrument measured by using Seiko Instruments Inc. DSC-100

Measuring condition

Rate (Heating rate) : 5°C/min
Amount of the sample : 15.0mg
Cell : Ag
Control cell : Al₂O₃

Measured at the open condition

Temperature range : RT to 150°C

The results of DSC measurement are shown in Figure 5.

In comparing the result of Example 1-1 with that of Comparative example 1-1, it was understood that the striking disparity was existed in the evaporation temperature of the water content. Namely, in the sample which removed HP-β-CD (Comparative example 1-1), the water evaporation peak can be observed at 65 to 90°C. However, in the sample which included the cholesterol ester in HP-β-CD (Example 1-1), the water evaporation peak can be observed at the wide range of 65 to 110°C, and the remarkable water evaporation peak further can be observed at 126 °C. So, it was suggested that the composition of the present invention (Example 1-1) was possessed high water-holding capacity.

Accordingly, it was suggested that the hydrous composition of the present invention which comprising the cholesterol ester clathrate and water was excellent in water-holding capacity, and was also possible to attempt the emulsification in stable.

Next, the inventors were studied about the effects in case of compounding the HACD.

The evaluation of emulsion stability has been done by the following standard.

[Emulsion Stability]

- : It was not observed the separation of the water phase and the oil phase even after kept the composition in 8 hours at 60°C.
- △ : It was observed the separation of the water phase and the emulsion phase in a part of the composition after kept the composition in 1 hour at 60°C.
- X : It was observed the separation of the water phase and the oil phase or the emulsion phase after passed 1 hour at 60°C.

Table-2

	Comp. ex.	Example		
	1-2	1-2	1-3	1-4
Cholesteryl ester of macadamia nut oil fatty acid	50	50	50	50
Ion-exchanged water	40	40	40	40
HE- β -CD	-	10	-	-
HP- β -CD	-	-	10	-
HE- β -CD	-	-	-	10
Diameter of emulsion particle (μm ;25°C)	1 to 10	1 to 5	1 to 5	1 to 8
Form of the composition	crumbly	had a viscoelasticity	had a viscoelasticity	had a viscoelasticity
Diameter of emulsion particle (μm ;60°C)	not existed	1 to 5	1 to 5	1 to 8
Emulsion stability (60°C)	X	○	○	○

As is clear from the above-described results, Comparative example 1-2 which was not compounded the HACD at all, was formed emulsion particle at 25°C. However, the emulsion stability at 60°C was bad, emulsion particle was not formed, and the separation of the water phase and the oil phase was observed. On the other hand, all the Examples 1-2 to 1-4 which were compounded the HACD, were excellent in emulsion stability at 60°C, and also had a fine emulsion particle, and its form at 25°C had a viscoelasticity. Example 1-2 and Example 1-3 which were compounded particularly HE- β -CD and HP- β -CD respectively, had further fine diameter of emulsion particle. So, it is preferable to use these as the HACD.

Accordingly, it is preferable to compound the HACD in the hydrous composition of the present invention.

Next, the inventors were compared the change of the water content of keratin by using the lipstick of the present invention which compounds the HACD, the cholesterol ester, and water (Example 1-5), the lipstick which compounds the hydrous composition comprising the cholesterol ester clathrate of the present invention and water (Example 1-6), the lipstick which was the same composition as these and was not comprising HP- β -CD and water (Comparative example 1-3).

These measurement condition is shown in the following.

Measurement of The Water Content of Keratin]

After wiped off softly the water content of lip by tissue paper in a thermo-hygrostat room(22°C and 45%), the conductance of the lip before putting lipstick on lip was measured. And then, putting lipstick on lip, and after passed 2 hours, wiped off the lipstick which was put on lip by tissue paper, and the conductance of the lip after put lipstick on lip was measured. And, the ratio of the conductance before put lipstick and the conductance after put lipstick were found.

Table-3

	Comp. ex. 1-3	Ex. 1-5	Ex. 1-6
5 Microcrystalline wax	1.0	1.0	1.0
Ceresin	13.5	14.5	14.5
Methylphenyl polysiloxane	10.0	10.0	10.0
10 Macadamia nut oil	0.5	0.5	0.5
Glyceryl triisostearate	18.0	18.0	18.0
Glyceryl tri(2-ethylhexanoate)	30.67	17.03	19.66
Lanolin	5.0	5.0	5.0
15 Adsorption refined lanolin	5.0	5.0	5.0
Cholesteryl ester of macadamia nut oil fatty acid	-	5.0	-
Dibasic calcium phosphate (anhydrous)	1.0	1.0	1.0
20 Dye	0.25	0.25	0.25
Coloring agent	15.0	15.0	15.0
Oxidation stabilizer	0.04	0.04	0.04
Perfume	0.04	0.04	0.04
25 Polyoxyethylene methylpolysiloxane copolymer	-	0.5	-
Synthetic sodium magnesium silicate	-	2.0	-
Ion-exchanged water	-	4.0	-
30 HP- β -CD	-	1.0	-
Calcium chloride dihydrate	-	0.13	-
Methyl polysiloxane emulsion	-	0.01	0.01
35 The hydrous composition of Example 1-1	-	-	10.0

The measurement results of the water content of keratin in case of using the lipstick which was obtained by Example 1-5, Example 1-6, and Comparative example 1-3 are shown in Figure 6.

As is clear from the drawing, in Example 1-5, it is suggested that the ratio of the conductance was slightly big as compared with the ratio of the conductance of Comparative example 1-3, and it can hold the more water content. Further, in Example 1-6, the ratio of the conductance was more than twice of the ratio of the conductance of Comparative example 1-3, and the sufficient water content was held.

And, when the evaluation of the usability was performed by the panel by using the lipsticks which were prepared by the above-mentioned formulation, Example 1-5 showed the characteristics such that was possessed the moisture feeling, was excellent in spreadability and affinity, and was less of stickiness as compared with Example 1-3.

Accordingly, in the case where the HACD, the cholesterol ester and water were compounded to the lipstick (Example 1-5), the lipstick which was slightly improved the water-holding capacity and was also excellent in usability, can be obtained. Further, before mixed with lipstick bases, the hydrous composition which comprising the cholesterol ester clathrate was prepared by the HACD, water, and the cholesterol ester. In the case where said hydrous composition was compounded to the lipstick (Example 1-6), the lipstick which had more than twice of water-holding capacity and was excellent in usability can be obtained. Accordingly, in the present invention, it is suggested that the moisture of the coated surface is keeping.

Further, the moisture effect was evaluated by measuring the penetrating amount of the water content, by using Example 1-6, Comparative example 1-3, and the lipstick which is used the conventional emulsion base as the same formulation with Example 1-6 in substitution of the hydrous composition of the present invention (Comparative example 1-4).

The measurement of the penetrating amount of the water content has been performed by coating the lipstick which was prepared by the various formulation, on the filter paper, and by measuring the change of the amount of water con-

tent. The results are shown in Figure 7.

In comparative example 1-3, the obtained lipstick had high blockage nature and had a little of the penetrating amount of the water content, since the lipstick was not comprised a lot of the water content. Thereupon, in case of comparing Example 1-6 with Comparative example 1-3, it was shown that the penetrating amount of the water content of Example 1-6 was less than that of Comparative example 1-3.

Accordingly, it is suggested that the hydrous composition of the present invention is rich in water-holding capacity, and furthermore, is stable as compared with the conventional products.

(2) Hydrous Composition Comprising a Hydrous Stabilizer

In the following, it will be explained the present invention in further detail from the examples. However, the present invention should not be limited to the following examples. Also, the compounding amount is expressed as parts by weight unless otherwise stated.

In first, the inventors were studied about the physical properties of the hydrous composition in accordance with the present invention. Namely, it was prepared the hydrous composition which comprising HP- β -CD, water, and a hydrous stabilizer or a humectant under the following formulation, and was studied the separation stability at high temperature of said composition.

[Separation stability]

- : It was not observed the separation of the water phase and the oil phase even after kept the composition in 8 hours at 90°C.
- △ : It was observed the separation of the water phase and the emulsion phase in a part of the composition after kept the composition in 1 hour at 80°C.
- X : It was observed the separation of the water phase and the oil phase after kept the composition in 1 hour at 80°C.

Table-4

	Comp. ex.				Example	
	2-1	2-2	2-3	2-4	2-1	2-2
Cholesteryl ester of macadamia nut oil fatty acid	70	70	70	70	70	70
Ion-exchanged water	20	20	20	20	20	20
HP- β -CD	0	10	10	10	10	10
Glycerin	0	0	2	0	0	0
1,3-Butylene glycol	0	0	0	2	0	0
Alkylated polysiloxane polyethylene copolymer	0	0	0	0	2	0
Alkyl silicated anhydrous silicate	0	0	0	0	0	2
Separation stability	X	△	△	△	○	○

As is clear from the above-described results, in Comparative example 2-1, the separation in the water phase and the oil phase was observed in case of keeping the composition in 1 hour at 80°C. Also, in Comparative example 2-2 to 2-4, the separation in a part of the water phase and the emulsion phase were observed in case of keeping the composition in 1 hour at 80°C. On the other hand, in Example 2-1 and 2-2, the separation in the water phase and the oil phase was not observed even in case of keeping the composition in 8 hours at 90°C. Accordingly, it is suggested that the hydrous composition of the present invention had high separation stability at high temperature.

Further, the inventors were performed the DSC measurement by using said Example 2-1, Example 2-2, and Comparative examples 2-1 to 2-3 under the following condition.

[DSC Measurement]

Measuring instrument Seiko Instruments Inc. DSC-100

5 Measuring condition

Rate (Heating rate) : 5°C/min

Amount of the sample : 15.0mg

Cell : Ag

10 Control cell : Al₂O₃

measured at the open condition

Temperature range : RT to 150°C

15

The results of DSC measurement are shown in Figure 8 and Figure 9.

As is clear from Figure 8, in Comparative example 2-1, the maximum peak of DSC measurement was observed at 73.1°C. In Comparative example 2-2 which was added HP-β-CD, the maximum peak of DSC measurement was observed at 83.5°C. Both Comparative examples 2-1 and 2-2 were not observed the large peak after the maximum peak. Accordingly, it is thinkable that the water content was evaporated at 50 to 90°C in Comparative examples 2-1 and 2-2.

In Comparative example 2-3 that was compounded glycerin which was the humectant used in general, the peak of DSC measurement was observed at in the vicinity of 80°C, and the gently curve was described even at the temperature over the peak. So, it can gathered that the water content was gradually evaporated. It is thinkable that this is due to the moisture ability of glycerin which was comprised in the composition. However, as for the water- holding at high temperature, the composition had a lack in stability.

On the other hand, in considering about Examples 2-1 and 2-2, each of the maximum peak of the DSC measurement were observed at more than 90°C such as 106.4 °C and 94.7°C respectively. Accordingly, it is suggested that the maximum peak of the temperature became more than 90°C by adding the hydrous stabilizer of the present invention, and the composition which was improved the water-holding capacity at high temperature can be obtained.

Further, the inventors were studied about the water evaporation rate of said Examples 2-1 and 2-2.

The results are shown in Figure 10.

As is clear from the drawing, in comparing with the results of Examples 2-1 and 2-2, the water evaporation rate of Example 2-1 was less than that of Example 2-2, the disparity was widened with passage of time. Namely, it was cleared that the side which was compounded alkylated polysiloxane polyethyleneglycol copolymer had low water evaporation rate in case of keeping in a long period of time and at high temperature.

Next, Example 2-3 and Comparative example 2-5 which removed HP-β-CD from the formulation of Example 2-3, were prepared as shown in the following formulation. And the compositions were taken on the preparation and were observed by microscope. And, DSC measurement was performed under the same condition as the above-described condition. In Example 2-3 and Comparative example 2-5, squalane was compounded for adjusting the viscosity.

The microphotographs which were obtained by microscope observation are shown in Figure 11. The results are shown in Table-4 together with its formulation. Also, the results of DSC measurement are shown in Figure 12.

Table-5

	Example 2-3	Comp. ex. 2-5
Cholesteryl ester of macadamia nut oil fatty acid	70	70
50 Ion-exchanged water	20	20
HP-β-CD	10	0
Alkylated polysiloxane polyethylene copolymer	2	2
55 Squalane (adjusting viscosity)	20	20
Diameter of emulsion particle (μm)	1 to 3	not existed
Form of the composition	creamlike in uniformly	ununiformity (separation into two phases)

As is clear from the above-described results and microphotographs, in Example 2-3 which was compounded HP- β -CD, the emulsion particle whose form was uniform creamlike and whose particle diameter was 1 to 3 μm , was existed. And it is thinkable that the emulsification was performed in stable. On the other hand, in Comparative example 2-5 which removed HP- β -CD from Example 2-3, the emulsion particle was not existed and the composition was separated into the oil phase and the water phase, therefore the emulsification cannot performed in stable.

Next, in case of comparing the results of DSC measurement in Figure 12, it was understood that the striking disparity of water evaporation temperature was existed between Example 2-3 and Comparative example 2-5. Namely, in Comparative example 2-5 which removed HP- β -CD from Example 2-3, the peak of water evaporation temperature was observed at 70 to 100°C. On the other hand, in Example 2-3 which compounded HP- β -CD, the peak of water evaporation temperature was observed at a range between 100 to 130°C. From these results, it is suggested that the composition of the present invention had the high water-holding capacity even under the severe circumstance more than 90°C.

Further, the inventors were studied about the effects of the compounding of the HACD.

Table-6

	Comp. ex.	Example			
	2-6	2-4	2-5	2-6	
Cholesteryl ester of macadamia nut oil fatty acid	70	70	70	70	
Ion-exchanged water	20	20	20	20	
HE- β -CD	-	10	-	-	
HP- β -CD	-	-	10	-	
HB- β -CD	-	-	-	10	
Alkylated polysiloxane polyethylene copolymer	2	2	2	2	
Diameter of emulsion particle (μm)	not existed	1 to 3	1 to 3	1 to 3	
Form of the composition	separation	cream like	cream like	cream like	

As is clear from the above-described results, in Comparative example 2-6 which was not compounded the HACD, the emulsion particle cannot be formed and the composition was separated into the water phase and the oil phase. On the other hand, in Example 2-4 to 2-6 which compounded the HACD, the emulsion particle were formed the small sphere whose diameter were 1 to 3 μm , and the excellent composition which is creamlike can be obtained.

Further, the inventors were prepared the lipstick (Example 2-7) which compounded the composition of Example 2-1, and the lipstick (Comparative example 2-7) which directly compounded the same amount as Example 2-1 of HP- β -CD, water, cholesteryl ester of macadamia nut oil fatty acid, and alkylated polysiloxane polyethylene copolymer. And, the visual observation (aggregation of coloring agent), change of the water content of keratin, and the penetrating amount of the water content, were compared by using these lipsticks which were prepared as above for evaluating the hydration properties at the time of the products were formed. These various lipsticks were prepared by the following process. The composition of the various lipsticks are shown in Table-7 together with the results of visual observation.

(Process 1; Example 2-7)

The hydrous composition was prepared in advance (cf. Example 2-1). The hydrous composition was added to the lipstick bases which were dissolved at 80°C. After stirred it 10 minutes by disper stirring, the obtained composition was kept in 5 minutes at 90°C.

(Process 2; Comparative example 2-7)

The lipstick bases were dissolved at 80°C. And after added and dissolved cholesteryl ester of macadamia nut oil fatty acid and alkylated polysiloxane polyethylene copolymer to it, adding the solution of HP- β -CD which was dissolved into water, to the oil phase, stirring it 10 minutes by disper stirring. And, the obtained composition was kept in 5 minutes at 90°C.

Table-7

	Comp. ex. 2-7	Example 2-7
A. Lipstick bases		
Carnauba wax	0.5	0.5
Candelilla wax	5.0	5.0
Ceresin	10.0	10.0
Squalane	11.0	11.0
Liquid paraffin	30.0	30.0
Glyceryl isostearate	14.8	14.8
Glyceryl diisostearate	8.3	8.3
B. Hydrous composition		
Hydrous composition of Example 2-1	-	20.4
HP- β -CD	2.0	-
Cholesteryl ester of macadamia nut oil fatty acid	14.0	-
Alkylated polysiloxane polyethylene copolymer	0.4	-
Ion-exchanged water	4.0	-
Visual Observation;	ununiformity by separated into the oil phase and the emulsion phase	the emulsion particle was uniformly dispersed

As is clear from the above-described results, as shown in Comparative example 2-7, in the case where the various ingredients of the hydrous composition were separately compounded, the obtained composition became ununiform by the separation into the oil phase and the emulsion phase, and had lack in the separation stability. In the case where the various ingredients were added separately to the composition, water was adsorbed to alkylated polysiloxane polyethylene copolymer used in the present invention as the hydrous stabilizer. And, silicone is inferior in compatibility with respect to the hydrocarbon type oily component. So, it is thinkable that the composition was separated into the emulsion phase of silicone active agent and the oil phase of hydrocarbon.

On the other hand, in Example 2-7 which comprising the hydrous composition of the present invention, the hydrous composition was uniformly dispersed. It is thought that the emulsion particle is considerably fine and has high dispersibility as shown in Example 2-3.

Accordingly, the hydrous composition of the present invention has high separation stability and can be favorably kept the water phase into the oil phase.

(3) Hydrous Composition Comprising a Clay Mineral

In first, the inventors paid attention to a clay mineral as the materials which improved the separation stability. And, they prepared the hydrous composition by the formulation of the following Table-8, and studied about the physical properties of the hydrous composition of the present invention. And, it has been studied by using HP- β -CD as the HACD, cholesteryl ester of macadamia nut oil fatty acid as the cholesterol ester, and synthetic sodium magnesium as the clay mineral. The following composition is shown as parts by weight.

[Separation Stability at High Temperature]

- : It was not observed the separation of the water phase and the oil phase even after kept the composition 8 hours at 90°C.
- △ : It was observed the separation of the water phase and the emulsion phase in a part of the composition after kept the composition in 1 hour at 80°C.
- X : It was observed the separation of the water phase and the oil phase or the emulsion phase after passed 1 hour at 80°C.

Table-8

	Comp. ex. 3-1	Comp. ex. 3-2	Example 3-1
Cholesteryl ester of macadamia nut oil fatty acid	60	60	60
Ion-exchanged water	40	40	40
HP- β -CD	0	10	10
Synthetic sodium magnesium silicate	0	0	5
Diameter of emulsion particle (μ m)	1-10	1-5	-
Form of the composition	crumbly	had a viscoelasticity	had a viscoelasticity
Separation stability	X	Δ	\bigcirc

As is clear from the above-described results, Comparative example 3-1 which was obtained by mixing the cholesterol ester and water, became crumbly itself, and had a large emulsion particle, and it was observed the separation into the water phase and the oil phase at high temperature. And also, Comparative example 3-2 which compounded HP- β -CD to Comparative example 3-1, had small diameter of emulsion particle and had a viscoelasticity. However, in case of keeping the composition at high temperature, it was observed the separation of the water phase and the emulsion phase in a part of the composition. On the other hand, in Example 3-1, the emulsion particle of sphere shape cannot be observed. However the excellent hydrous composition which had a viscoelasticity and had a high separation stability even at high temperature can be obtained.

Further, the inventors were performed the DSC measurement about the Example 3-1, Comparative example 3-1, and 3-2 by the following condition. The results are shown in Figure 13.

[DSC Measurement]

Measuring instrument Seiko Instruments Inc DSC-100

Measuring condition

Rate (Heating rate) : 5°C/min

Amount of the sample : 15.0mg

Cell : Ag

Control cell : Al₂O₃

measured at the open condition

Temperature range : RT to 150°C

As is clear from the drawings, in Comparative example 3-1, the maximum peak was 73.1°C and was lower than that of Comparative example 3-2 and Example 3-1.

The maximum peak of Comparative example 3-2 and Example 3-1 were 83.5°C and 82.4°C respectively, and were almost equivalent. However, in Example 3-1, the peak were observed at 103.6°C and 128°C, and the evaporation of the water content can be observed even more than 100°C. It was thought as the peak of water which is held in stable, since synthetic sodium magnesium silicate take water into the middle of the phases.

Accordingly, from the physical properties of the composition and the results of DSC measurement, it is suggested that the composition in accordance with the present invention is the composition which has high separation stability and is also excellent in water-holding.

Next, the inventors were studied about the effects of the compounding of the hydroxyalkylated cyclodextrin.

Table-9

	Comp. ex.	Example			
		3-3	3-2	3-3	3-4
Cholesteryl ester of macadamia nut oil fatty acid	68	68	68	68	68
Ion-exchanged water	20	20	20	20	20
HP- β -CD	-	10	-	-	-
HE- β -CD	-	-	-	10	-
HB- β -CD	-	-	-	-	10
Synthetic sodium magnesium silicate	5	5	5	5	5
Diameter of emulsion particle (μ m)	-	-	-	-	-
Form of the hydrous composition	separation	had a viscoelasticity	had a viscoelasticity	had a viscoelasticity	had a viscoelasticity
Separation stability	X	○	○	○	○

As is clear from the above-described results, in Comparative example 3-3 which was not compounded the HACD at all, the separation of the water phase and the oil phase at high temperature was observed. On the other hand, in Examples 3-2 to 3-4 which were compounded HP- β -CD, HE- β -CD, and HB- β -CD respectively, each of the composition had a viscoelasticity, and became excellent in the separation stability at high temperature.

Accordingly, it is suggested that the composition which is favorably improved the separation stability can be obtained, by compounding the hydroxyalkylated cyclodextrin.

Next, the inventors were studied about the relationships between the compounding amount of the clay mineral and separation stability of the hydrous composition at high temperature.

Table-10

	Example					
	3-5	3-6	3-7	3-8	3-9	3-10
Cholesteryl ester of macadamia nut oil fatty acid	68	68	68	68	68	68
Squalane	20	20	20	20	20	20
Synthetic sodium magnesium silicate	0	1	3	5	10	20
HP- β -CD	10	10	10	10	10	10
Glycerin	2	2	2	2	2	2
Water	20	20	20	20	20	20
Separation stability	X	Δ	Δ	○	○	○

As is clear from the above-described results, in the condition which was not compounded synthetic sodium magnesium silicate, the separation stability at high temperature is bad, and the separation of the water phase and the oil phase or the emulsion phase was confirmed. Also, in the case where 1 to 3 parts by weight of synthetic sodium magnesium silicate were compounded, though the stability were improved, the improvement was not sufficient. On the other hand, in the case where 5 to 20 parts by weight of synthetic sodium magnesium silicate were compounded, separation stability at high temperature were improved.

Next, the inventors were prepared the hydrous composition under the following formulation by using other clay min-

erals, and were studied about the emulsion stability.

Table-11

	Example				
	3-11	3-12	3-13	3-14	3-15
Cholesteryl ester of macadamia nut oil fatty acid	68	68	68	68	68
Squalane	20	20	20	20	20
Lithium tenorite	5	-	-	-	-
Sodium tetra silicate mica	-	5	-	-	-
Lithium hectorite	-	-	5	-	-
Mica	-	-	-	5	-
Dimethyl stearyl ammonium hectorite	-	-	-	-	5
HP- β -CD	10	10	10	10	10
Glycerin	2	2	2	2	2
Water	20	20	20	20	20
Separation stability	○	○	○	△	○

From the above-described results, in case of using lithium tennessee, sodium tetra silicate mica, lithium hectorite which were the swelling type clay mineral as like synthetic sodium magnesium silicate, the separation stability were improved, as like the case used synthetic sodium magnesium silicate. And, in case of compounding dimethylstearyl ammonium hectorite which was the organophilic smectite, the improvement of separation stability can be observed.

On the other hand, in case of compounding mica which was the non-swelling type clay mineral, separation stability was improved in a part, but the sufficient stability cannot be obtained.

Next, the inventors were studied about the compounding of hydrophobic silica for improving the separation stability by compounding a little amount of the clay mineral and for obtaining a further fine emulsion particle, since the clay minerals were caused the surface roughness and were worsened the feeling of use in some time. The diameter of emulsion particle was observed by using light microscope. The evaluation was studied about separation stability at high temperature and water-holding capacity.

[Water-Holding Capacity]

- : Water evaporation rate after passed 8 hours at 90°C was less than 20%
 X : Water evaporation rate after passed 8 hours at 90°C was 20% or more

Table-12

	Example						
	3-16	3-17	3-18	3-19	3-20	3-21	3-22
Cholesteryl ester of macadamia nut oil fatty acid	68	68	68	68	68	68	68
Squalane	20	20	20	20	20	20	20
Hydrophobic silica	2	2	2	2	2	2	2
Synthetic sodium magnesium silicate	3	-	-	-	-	-	-
Lithium tenorite	-	3	-	-	-	-	-
Sodium tetra silicate mica	-	-	3	-	-	-	-
Lithium hectorite	-	-	-	3	-	-	-
Mica	-	-	-	-	3	-	-
Dimethyl stearyl ammonium hectorite	-	-	-	-	-	3	-
Aluminium magnesium silicate processed with di-stearyl-dimethyl ammonium chloride	-	-	-	-	-	-	3
HP- β -CD	10	10	10	10	10	10	10
Glycerin	2	2	2	2	2	2	2
Water	20	20	20	20	20	20	20
Diameter of emulsion particle (μm)	1 to 8	1 to 8	1 to 8	1 to 8	3 to 20	1 to 3	1 to 3
Separation stability	○	○	○	○	○	○	○
Water-holding capacity	○	○	○	○	○	○	○

As is clear from the above-described results, in the case where hydrophobic silica and the clay mineral were compounded with combining, the improvement of separation stability at 90°C can be observed in all clay minerals. And, in the case where 3 parts by weight of synthetic sodium magnesium silicate was compounded in separately, the separation stability at high temperature was not sufficient (in Table-7, Example 3-4). However, in the case where hydrophobic silica was compounded, the sufficient separation stability can be obtained. Also, since the compounding amount of the clay mineral was small, it was not caused the problems in the feeling of use such as surface roughness.

Further, when the inventors measured the diameter of emulsion particle of each composition by using light microscope, the fine emulsion particle whose diameter were 1 to 8 μm were observed in the swelling type clay mineral and the organophilic smectite. On the other hand, in mica which is the non-swelling type clay mineral, the considerable large emulsion particle whose diameter was 3-20 μm was formed.

Accordingly, in the case where hydrophobic silica was compounded, the separation stability at high temperature was improved and the excellent hydrous composition which had fine emulsion particle was also formed, by compounding just a small amount of clay mineral.

Next, by using HE- β -CD, HP- β -CD and HB- β -CD, the study were performed about the properties of the composition which were compounded with hydrophobic silica. In this place, synthetic sodium magnesium silicate was used as the clay mineral.

Table-13

	Ex. 3-23	Ex. 3-24	Ex. 3-25
Cholesteryl ester of macadamia nut oil fatty acid	68	68	68
Squalane	20	20	20
Hydrophobic silica	2	2	2
Synthetic sodium magnesium silicate	5	5	5
HE- β -CD	10	-	-
HP- β -CD	-	10	-
HB- β -CD	-	-	10
Glycerin	2	2	2
Water	20	20	20
Diameter of emulsion particle (μm)	2 to 8	2 to 8	2 to 8
Separation stability	○	○	○
Form of the composition	had a viscoelasticity	had a viscoelasticity	had a viscoelasticity

As is clear from the above-described results, in the case where hydrophobic silica was combined with any one of said HACD, the emulsion particle which had a viscoelasticity and fine particle diameter can be formed. In particular, it was more preferable to compound with HE- β -CD or HP- β -CD, since the fine emulsion particle was formed.

Next, the inventors were studied about the compounding amount of hydrophobic silica. In this place, synthetic sodium magnesium silicate was used as the clay mineral.

Table-14

	Example						
	3-26	3-27	3-28	3-29	3-30	3-31	3-32
Cholesteryl ester of macadamia nut oil fatty acid	68	68	68	68	68	68	68
Squalane	20	20	20	20	20	20	20
Hydrophobic silica	0	0.01	1	5	10	20	25
Synthetic sodium magnesium silicate	3	3	3	3	3	3	3
HP- β -CD	10	10	10	10	10	10	10
Glycerin	2	2	2	2	2	2	2
Water	20	20	20	20	20	20	20
Compounding amount of hydrophobic silica (%by weight)	0	0.016	0.8	3.9	7.5	14.0	19.6
Diameter of emulsion particle (μm)	-	3 to 30	2 to 15	1 to 2	to 1	to 1	to 1
Separation stability	△	○	○	○	○	○	○

As is clear from the above-described results, in the case where hydrophobic silica was not compounded at all, the separation stability was not improved, and the emulsion particle cannot be observed. On the other hand, in the case where more than 20% by weight of hydrophobic silica were compounded, the improvement of the separation stability can be observed. However, the compounding amount of silica became large in relative, it sometimes worsened the feeling of use of the composition.

Accordingly, it is preferable to compound hydrophobic silica within a range of 0.01 to 20% by weight.

Next, the study was performed about the ratio of the compounding amount of hydrophobic silica and the clay mineral in the case where hydrophobic silica and the clay mineral were used by combining together.

In this place, synthetic sodium magnesium silicate was used as the clay mineral.

Table-15

	Example						
	3-33	3-34	3-35	3-36	3-37	3-38	3-39
Cholesteryl ester of macadamia nut oil fatty acid	68	68	68	68	68	68	68
Squalane	20	20	20	20	20	20	20
Hydrophobic silica	2	2	2	2	2	2	2
Synthetic sodium magnesium silicate	0	1	3	5	7	10	20
HP- β -CD	10	10	10	10	10	10	10
Glycerin	2	2	2	2	2	2	2
Water	20	20	20	20	20	20	20
Diameter of emulsion particle (μ m)	3 to 20	2 to 15	2 to 8	2 to 8	1 to 5	-	-
Separation stability	○	○	○	○	○	○	○

As is clear from the above-described results, in the case where hydrophobic silica was compounded, the excellent separation stability can be obtained in all the hydrous composition. Also, in measuring the diameter of emulsion particle, in the case where synthetic sodium magnesium silicate was not compounded, it was formed the emulsion particle whose diameter was 3 to 20 μ m, and the fine emulsion particle was not formed (Example 3-33 and Figure 14A). Also, in the case where more than 10 parts by weight of synthetic sodium magnesium silicate was compounded, though the separation of the water phase and the emulsion phase was not observed, the emulsion particle cannot be observed (Example 3-39 and Figure 14F). On the other hand, in the case where 1 to 7 parts by weight of synthetic sodium magnesium silicate were compounded, it can formed the fine emulsion particle whose diameter was 1 to 15 μ m (Example 3-34 to 3-37, Figure 14 B to E).

Also, Figure 15 is the results of the study of the water evaporation rate by using the above-described Example 3-33 to 3-39. As is clear from Figure 15, the water evaporation rate was inhibited by compounding synthetic sodium magnesium silicate. Accordingly, it is suggested that the water-holding capacity was improved by the addition of clay mineral.

Accordingly, in the case where hydrophobic silica and the clay mineral were compounded by combining together, the ratio of the compounding amount of hydrophobic silica to the clay mineral was preferably 2 : 1 to 1 : 4.

Further, it will be shown the more concrete compounding examples of the present invention.

(1) Compounding Examples Used a Hydrous Composition Comprising a Cholesterol Ester Clathrate Each of the compounding examples had a large conductance ratio of the water

content of keratin, and were excellent in water-holding capacity and keeping stability, and had no apprehension about the irritation for skin.

Compounding example 1-1 Skin lotion

A. Water phase part	
Glycerin	10.0 % by weight
Propylene glycol	5.0
Ethanol	5.0
Parahydroxybenzoic acid ester	0.2
Purified water	residue
B. Hydrous composition	
HP- β -CD	0.4
Cholesterol ester (Olive oil fatty acid)	0.1
Purified water	0.5
C. Oil phase part	
Cetyl isooctanoate	4.0
2-Ethylhexyl 4-methoxycinnamate	0.1

(Process)

Adding the solution of HP- β -CD which was dissolved into 0.1% by weight of purified water to the cholesterol ester of 60°C, and stirring it 10 minutes by a disper. And then, adding the rest of purified water (0.4% by weight) to it and stirring it 10 minutes by a homomixer, and the hydrous composition was prepared. After adding this hydrous composition to the water phase part, adding the oil phase part to it and stirring it 10 minutes by a homomixer, and the skin lotion was obtained.

Compounding example 1-2 Lipstick

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Isostearic acid)	3.5
Glycerin	0.5
Purified water	2.0
C.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

Adding the solution of HP- β -CD which was dissolved into 0.5 parts by weight of purified water to the cholesterol ester of 60°C, and stirring it 10 minutes by a disper. And then, adding the rest of purified water (1.5 parts by weight) and glycerin to it and stirring it 10 minutes by a homomixer, and the hydrous composition was prepared. The lipstick bases were dissolved at 80°C, and the hydrous composition was added to this. After stirring it 10 minutes by a disper, adding coloring agent, perfume, and antiseptic to it, dispersing and stirring it, then the lipstick was formed

Compounding example 1-3 Lipstick

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Oleic acid)	3.5
Glycerin	0.5
Purified water	2.0
C.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 1-2.

Compounding example 1-4 Lipstick

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Isostearic acid)	4.0
Glycerin	0.5
Purified water	1.5
C.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 1-2.

Compounding example 1-5 Lipstick

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HE- β -CD	1.0
Cholesterol ester (Oleic acid)	4.0
Glycerin	0.5
Purified water	1.5
C.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 1-2.

Compounding example 1-6 Lipstick

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HP- β -CD	1.0
Cholesteryl ester of macadamia nut oil fatty acid	3.5
Glycerin	0.2
Purified water	2.0
C.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 1-2.

(2) Hydrous composition comprising a hydrous stabilizer

Each of the compounding examples had a large conductance ratio of the water content of keratin, and were excellent in water-holding capacity and keeping stability, and had no apprehension about the irritation for skin.

Compounding example 2-1 Lipstick

A. Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B. Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (isostearic acid)	3.5
Alkylated polysiloxane polyethylene copolymer	0.2
Glycerin	0.5
Purified water	1.0
C. Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

Dispersing alkylated polysiloxane polyethylene copolymer as the hydrous stabilizer into the cholesterol ester of 60°C, and adding the solution of HP- β -CD which was dissolved into 0.5 parts by weight of purified water to it, and stirring it 10 minutes by a disper. And then, adding the rest of purified water (1.5 parts by weight) and glycerin to it and stirring it 10 minutes by a homomixer, and the hydrous composition was prepared. The hydrous composition was added to the lipstick bases which were dissolved at 80°C. After stirring it 10 minutes by a disper, adding coloring agent, perfume, and antiseptic to it and dispersing and stirring it. And then, forming it and the lipstick was obtained.

Compounding example 2-2 Lipstick

A. Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B. Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Oleic acid)	3.5
Alkyl silicated anhydrous silicate	0.2
Glycerin	0.5
Purified water	1.0
C. Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 2-1.

Compounding example 2-3 Lipstick

A. Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B. Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Stearic acid)	3.5
Glyceryl-modified silicone resin coated powder	0.2
Glycerin	0.5
Purified water	2.0
C. Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 2-1.

Compounding example 2-4 Lipstick

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Oleic acid)	3.5
Dextrin fatty acid ester	0.2
Glycerin	0.5
Purified water	1.5
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 2-1.

Compounding example 2-5 Lipstick

A. Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B. Hydrous composition	
HE- β -CD	1.0
Cholesterol ester (Oleic acid)	3.5
Alkylated polysiloxane polyethylene copolymer	0.2
Glycerin	0.5
Purified water	1.5
C. Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 2-1.

Compounding example 2-6 Lipstick

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HB- β -CD	1.0
Cholesteryl ester of macadamia nut oil fatty acid	3.5
Alkyl silicated anhydrous silicate	0.2
Glycerin	0.5
Purified water	1.5
C.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 2-1.

Compounding example 2-7 Lipstick

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Oleic acid)	3.5
Squalane	2.0
Alkylated polysiloxane polyethylene copolymer	0.2
Glycerin	0.5
Purified water	1.5
C.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

After compounding squalane into the cholesterol ester of 60°C for adjusting the viscosity, dispersing alkylated polysiloxane polyethylene copolymer as the hydrous stabilizer into the cholesterol ester of 60°C, and adding the solution of HP- β -CD which was dissolved into 0.5% by weight of water to it, and stirring it 10 minutes by a disper. And then, adding the rest of purified water (1.5%by weight) and glycerin to it and stirring it 10 minutes by a homomixer, and the hydrous composition was prepared. The lipstick bases were dissolved at 80°C, and the hydrous composition was added to this. And, alter stirring it 10 minutes by a disper, adding coloring agent, perfume, and antiseptic to it, dispersing and stirring it. And then, forming it and the lipstick was obtained.

Compounding example 2-8 Cream

A.Oil phase	
Microcrystalline wax	8.0 parts by weight
Solid paraffin	2.0
Beeswax	3.0
Petrolatum	6.0
Hydrogenated lanolin	5.0
Squalane	30.0
Hexadecyl adipate ester	8.0
Glyceryl monooleate	3.5
POE(20) sorbitol monooleate ester	1.0
B.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.
C.Water phase	
Purified water	15.0
Propylene glycol	5.0
D.Hydrous composition	
HP- β -CD	1.0
Cholesteryl ester of macadamia nut oil fatty acid	3.5
Squalane	2.0
Alkylated polysiloxane polyethylene copolymer	0.2
Glycerin	1.5
Purified water	1.5

(Process)

After compounding squalane into cholesteryl ester of macadamia nut oil fatty acid of 60°C for adjusting the viscosity, alkylated polysiloxane polyethylene copolymer as the hydrous stabilizer was dispersed into it. Adding the solution of HP- β -CD which was dissolved into 0.5 parts by weight of purified water to it, and stirred it 10 minutes by a disper. And then, adding ther rest of purified water (1.5 parts by weight) and glycerin to it and stirring it 10 minutes by a homomixer, and the hydrous composition was prepared.

Alter heating and dissolving the oil phase, preparing it at 70°C by adding antiseptic agent, antioxidant, and perfume to it. Preparing by adding propylene glycol to purified water at 70°C (water phase) . The water phase was gradually added into the oil phase which was prepared in advance. After emulsifying by stirring it 10 minutes by a homomixer, adding the hydrous composition which was prepared by the above-mentioned process to it. Alter further stirring it 10 minutes by a homomixer, the cream was obtained by deaerating and cooling it.

(3) Hydrous composition comprising a clay mineral

Each of the compounding examples showed favorable separation stability at high temperature, and the compound-

ing examples itself were excellent in water-holding capacity, and it became the excellent composition which had no apprehension about irritation for skin.

Compounding example 3-1 Lipstick

A. Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B. Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Isostearic acid)	3.5
Synthetic sodium magnesium silicate	2.0
Glycerin	0.5
Water	1.0
C. Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

Dispersing alkylated polysiloxane polyethylene copolymer as the hydrous stabilizer into the cholesterol ester of 60°C, and adding the solution of HP- β -CD which was dissolved into 0.5% by weight of water to it, and stirring it 10 minutes by a disper. And then, adding the rest of water and glycerin to it and stirring it 10 minutes by a homomixer, and the hydrous composition was prepared. The hydrous composition was added to the lipstick bases which were dissolved at 80°C. And, after stirring it 10 minutes by a disper, adding coloring agent, perfume, and antiseptic to it, and dispersing and stirring it. And then, forming it and the lipstick was obtained.

Compounding example 3-2 Lipstick

A. Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B. Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Oleic acid)	3.5
Squalane	2.0
Sodium tetra silicate mica	0.5
Glycerin	1.0
Water	1.0
C. Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 3-1.

Compounding example 3-3 Lipstick

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HP- β -CD	1.0
Cholesterol ester (Oleic acid)	3.5
Squalane	2.0
Sodium tetra silicate mica	0.5
Hydrophobic silica	0.5
Glycerin	1.0
Water	1:0
C.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 3-1.

Compounding example 3-4 Lipstick

A. Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B. Hydrous composition	
HE- β -CD	1.0
Cholesterol ester (Oleic acid)	3.5
Sodium tetra silicate mica	0.5
Glycerin	0.5
Water	1.5
C. Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

(Process)

The lipstick was obtained by the same process with Compounding example 3-1.

Compounding example 3-5 Lipstick

5

10

15

20

25

30

A.Lipstick bases	
Carnauba wax	0.5 parts by weight
Candelilla wax	5.0
Ceresin	10.0
Squalane	30.0
Glyceryl triisostearate	10.0
Glyceryl diisostearate	20.0
B.Hydrous composition	
HB- β -CD	1.0
Cholesteryl ester of macadamia nut oil fatty acid	3.5
Synthetic sodium magnesium silicate	0.5
Hydrophobic silica	0.5
Glycerin	0.2
Water	2.0
C.Other bases	
Coloring agent	q.s.
Perfume	q.s.
Antiseptic	q.s.

35 (Process)

The lipstick was obtained by the same process with Compounding example 3-1.

40

45

50

55

Compounding example 3-6 Cream

A.Oil phase	
Microcrystalline wax	8.0 parts by weight
Solid paraffin	2.0
Beeswax	3.0
Petrolatum	6.0
Hydrogenated lanolin	5.0
Squalane	30.0
Hexadexyl adipate ester	3.0
Glyceryl monooleate	3.5
POE (20) sorbitol monooleate ester	1.0
B.Other bases	
Antiseptic	q.s.
Antioxidant	q.s.
Perfume	q.s.
C.Water phase	
Purified water	15.0
Propylene glycol	5.0
D.Hydrate composition	
HP- β -CD	1.0
Cholesteryl ester of macadamia nut oil fatty acid	3.5
Squalane	2.0
Synthetic sodium magnesium silicate	0.5
Glycerin	1.5
Purified water	1.5

(Process)

After compounding squalane into cholesteryl ester of macadamia nut oil fatty acid of 60°C for adjusting the viscosity, dispersing synthetic sodium magnesium silicate into it, and adding the solution of HP- β -CD which was dissolved into the purified water to it, and stirring it 10 minutes by a disper. And then, the hydrous composition was prepared.

After heating and dissolving the oil phase, preparing it at 70°C by adding antiseptic agent, antioxidant, and perfume to it. Preparing by adding propylene glycol to water at 70°C (water phase). The water phase was gradually added into the oil phase which was prepared in advance, after emulsifying by stirring it 10 minutes by a homomixer, adding the hydrous composition which was prepared by the above-mentioned process, to it. After further stirring it 10 minutes by a homomixer, the cream was obtained by deaerating and cooling it.

Claims

1. A cholesterol ester clathrate comprising a cholesterol ester included in a hydroxyalkylated cyclodextrin.
2. A hydrous composition comprising:

a hydroxyalkylated cyclodextrin,
a cholesterol ester, and
water.

5 3. A hydrous composition according to claim 2, wherein the hydroxyalkylated cyclodextrin and the cholesterol ester are formed the cholesterol clathrate of claim 1.

4. A hydrous composition according to claim 2 or 3, wherein said composition comprises:

10 5 to 30% by weight of the hydroxyalkylated cyclodextrin,
5 to 80% by weight of the cholesterol ester, and
5 to 60% by weight of water.

15 5. A hydrous composition according to claim 2 or 3, wherein the ratio of the compounding amount of the hydroxyalkylated cyclodextrin and the cholesterol ester is existed within the range represented by the slant line of the triangular diagram shown in Figure 1.

6. A hydrous composition comprising:

20 a hydroxyalkylated cyclodextrin,
water, and
one or more of a hydrous stabilizer which is/are selected from the group such as alkylated polysiloxane polyethyleneglycol copolymer, alkylated silicated anhydrous silicate, alkyl-modified silicone resin coated powder, glyceryl-modified silicone resin coated powder, dextrin fatty acid ester.

25 7. A hydrous composition according to claim 6, wherein said composition further comprising a hydrous oily component.

30 8. A hydrous composition according to claim 7, wherein said composition comprises:

5 to 30% by weight of the hydroxyalkylated cyclodextrin,
5 to 60% by weight of water, and
5 to 80% by weight of the hydrous oily component with respect to the whole amount of the hydrous composition.

35 9. A hydrous composition according to claim 7, wherein the ratio of the compounding amount of the hydroxyalkylated cyclodextrin, water and the hydrous oily component is existed within the range represented by the slant line of the triangular diagram shown in Figure 2.

40 10. A hydrous composition according to any of claims 6 to 9, wherein said composition comprises 0.01 to 20% by weight of the hydrous stabilizer with respect to the whole amount of the hydrous composition.

11. A hydrous composition comprising:

45 a hydroxyalkylated cyclodextrin,
a cholesterol ester,
a clay mineral, and
water.

50 12. A hydrous composition according to claim 11, wherein said composition comprises:

5 to 30% by weight of the hydroxyalkylated cyclodextrin,
5 to 80% by weight of the cholesterol ester,
0.01 to 20% by weight of the clay mineral, and
55 5 to 60% by weight of water with respect to the whole amount of the hydrous composition.

13. A hydrous composition according to claim 11 or 12, wherein the clay mineral is a swelling type clay mineral or an organophilic smectite.

14. A hydrous composition according to claim 12, wherein the clay mineral is synthetic sodium magnesium silicate.
15. A hydrous composition according to any of claims 11 to 14, wherein said composition further comprising hydrophobic silica.
16. A hydrous composition according to claim 15, wherein said composition comprises 0.01 to 20% by weight of hydrophobic silica with respect to the whole amount of the hydrous composition.
17. A hydrous composition according to claim 15 or 16, wherein the ratio of the compounding amount of hydrophobic silica to the clay mineral is 2 : 1 to 1 : 4.
18. A cosmetics comprising:
 - a hydroxyalkylated cyclodextrin,
 - a cholesterol ester, and
 - water.
19. A cosmetics according to claim 18, wherein the hydroxyalkylated cyclodextrin, the cholesterol ester, and water are compounded as the hydrous composition according to any of claims 2 to 17.
20. A cosmetics according to claim 18 or 19, wherein the emulsion type of the cosmetics is water-in-oil type.
21. A cosmetics according to any of claims 18 to 20, wherein the hydrous composition according to any of claims 2 to 17 is compounded with 0.5 to 30% by weight with respect to the whole amount of the cosmetics.
22. A process for the preparation of a cholesterol ester clathrate: the cholesterol ester clathrate is obtained by stirring and mixing a hydroxyalkylated cyclodextrin and a cholesterol ester.
23. A process for the preparation of a hydrous composition: the hydrous composition is obtained by stirring and mixing a hydroxyalkylated cyclodextrin, water and a cholesterol ester.
24. A process for the preparation of a hydrous composition: the hydrous composition is obtained by stirring and mixing the cholesterol ester clathrate which is prepared by the process for the preparation of the hydrous composition according to claim 22, and water.
25. A process for the preparation of the hydrous composition according to claim 23 or 24, wherein 5 to 30% by weight of the hydroxyalkylated cyclodextrin, 5 to 80% by weight of the cholesterol ester, and 5 to 60% by weight of water are compounded with respect to the whole amount of the hydrous composition.
26. A process for the preparation of the hydrous composition according to claim 23 or 24, wherein the ratio of the compounding amount of the hydroxyalkylated cyclodextrin and the cholesterol ester is existed within the range represented by the slant line of the triangular diagram shown in Figure 1.
27. A process for the preparation of the hydrous composition: the hydrous composition is obtained by stirring and mixing a hydroxyalkylated cyclodextrin; water; one or more of a hydrous stabilizer which is/are selected from the group such as alkylated polysiloxane polyethyleneglycol copolymer, alkylated silicated anhydrous silicate, alkyl-modified silicone resin coated powder, glyceryl-modified silicone resin coated powder and dextrin fatty acid ester; and a hydrous oily component.
28. A process for the preparation of the hydrous composition according to claim 27, wherein 5 to 30% by weight of the hydroxyalkylated cyclodextrin, 5 to 60% by weight of water, and 5 to 80% by weight of the hydrous oily component are compounded with respect to the whole amount of the hydrous composition.
29. A process for the preparation of the hydrous composition according to claim 27, wherein the ratio of the compounding amount of the hydroxyalkylated cyclodextrin, water, and the hydrous oily component is existed within the range represented by the slant line of the triangular diagram shown in Figure 1.
30. A process for the preparation of the hydrous composition according to any of claims 27 to 29, wherein 0.01 to 20% by weight of the hydrous stabilizer is compounded with respect to the whole amount of the hydrous composition.

31. A process for the preparation of the hydrous composition: the hydrous composition is obtained by stirring and mixing a hydroxyalkylated cyclodextrin, a cholesterol ester, a clay mineral and water.
- 5 32. A process for the preparation of the hydrous composition according to claim 31, wherein 5 to 30% by weight of the hydroxyalkylated cyclodextrin, 5 to 80% by weight of the cholesterol ester, 0.01 to 20% by weight of the clay mineral, and 5 to 60% by weight of water are compounded with respect to the whole amount of the hydrous composition.
- 10 33. A process for the preparation of the hydrous composition according to claim 31 or 32, wherein the clay mineral is a swelling type clay mineral or an organophilic smectite.
34. A process for the preparation of the hydrous composition according to claim 33, wherein the clay mineral is synthetic sodium magnesium silicate.
- 15 35. A process for the preparation of the hydrous composition according to any of claims 31 to 34, wherein the hydrous composition is obtained by further compounding hydrophobic silica and stirring and mixing it.
- 20 36. A process for the preparation of the hydrous composition according to claim 35, wherein to % by weight of hydrophobic silica is compounded.
- 25 37. A process for the preparation of the hydrous composition according to claim 35 or 36, wherein the ratio of the compounding amount of hydrophobic silica to the clay mineral is 2 : 1 to 1 : 4.
38. A process for the preparation of the cosmetics: the cosmetics is obtained by stirring and mixing the hydrous composition which is prepared by the process for the preparation of the hydrous composition according to any one of claims 23 to 37, and other ingredients.
- 30 39. A process for the preparation of the cosmetics according to claim 38, wherein 0.5 to 30% by weight of the hydrous composition which is prepared by the process for the preparation of the hydrous composition according to any of claims 23 to 37, is compounded with respect to the whole amount of the cosmetics.

FIG. 1



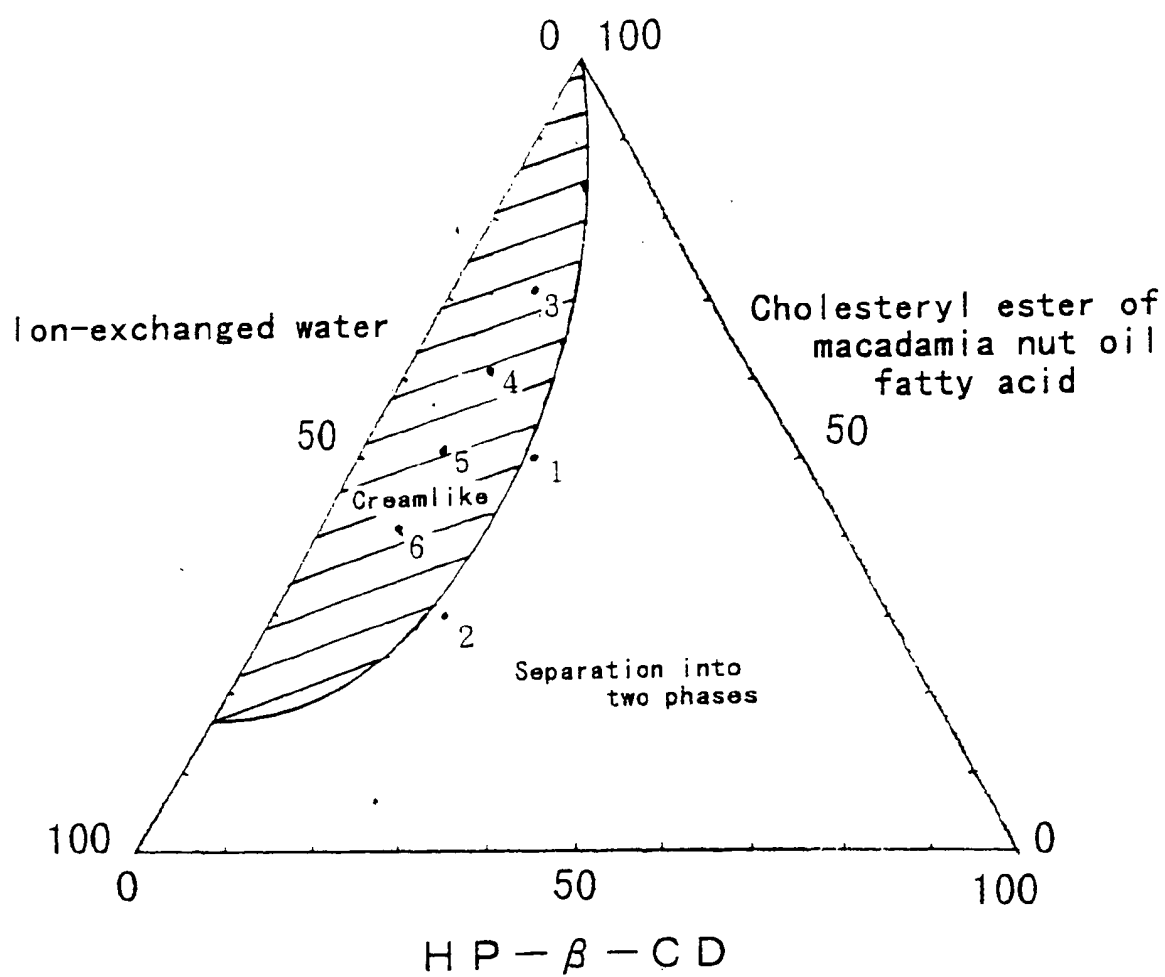



FIG. 2

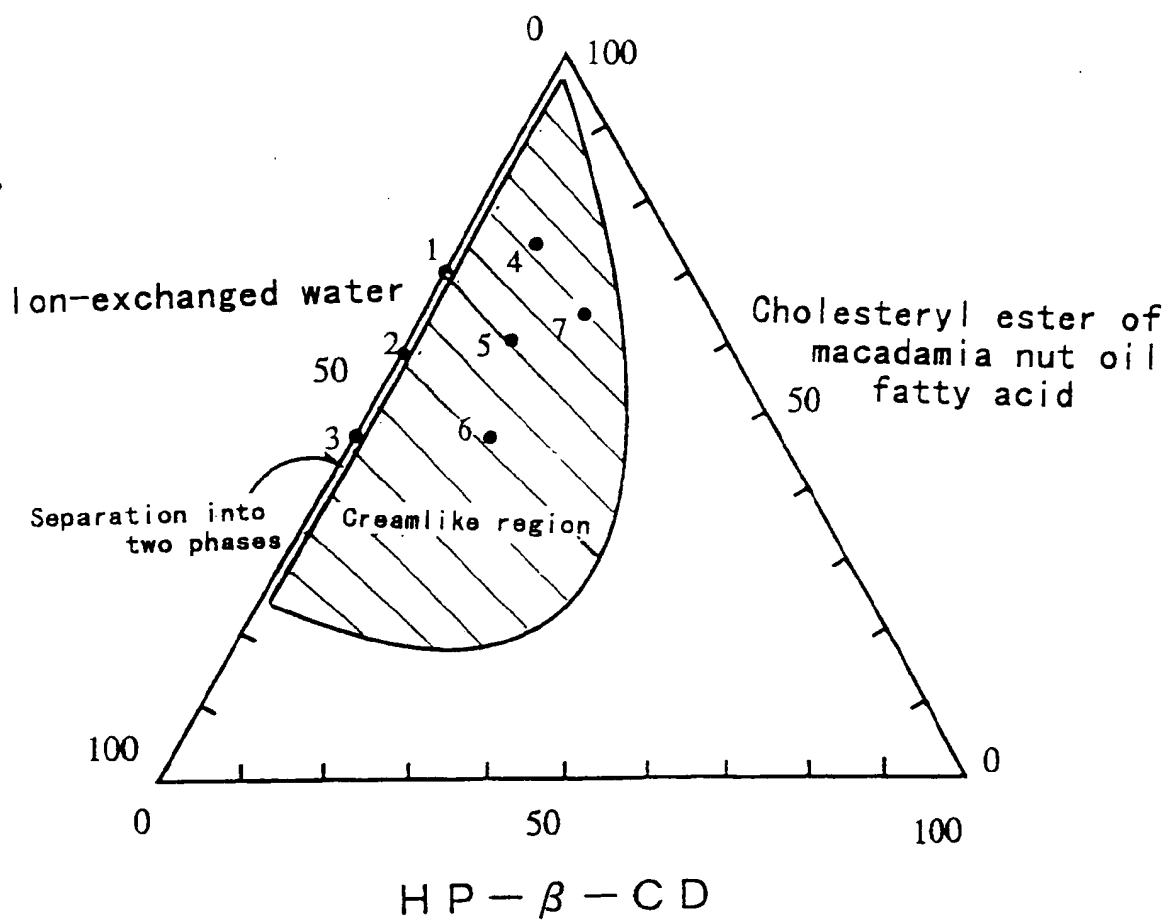


F I G. 3

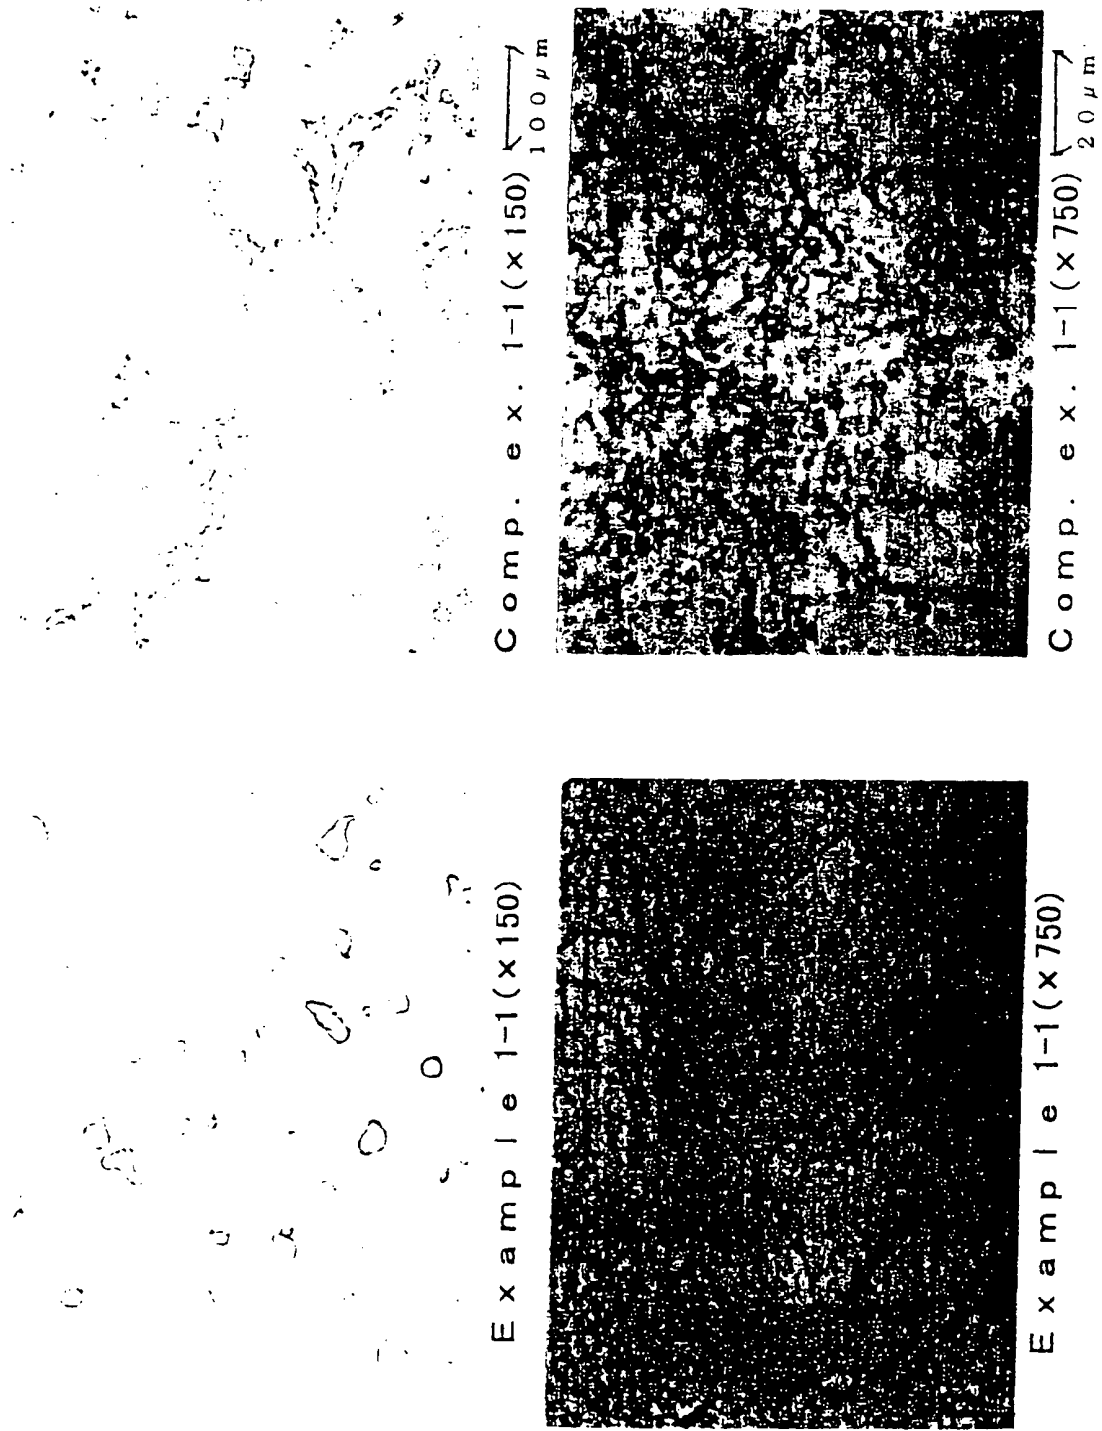

F I G . 4

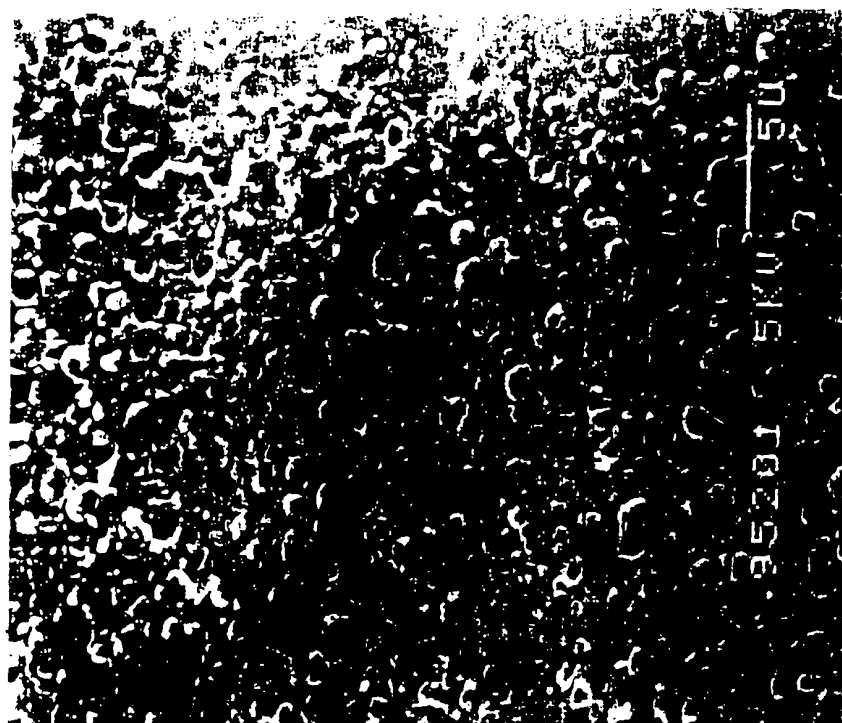


E x a m p l e 1-1

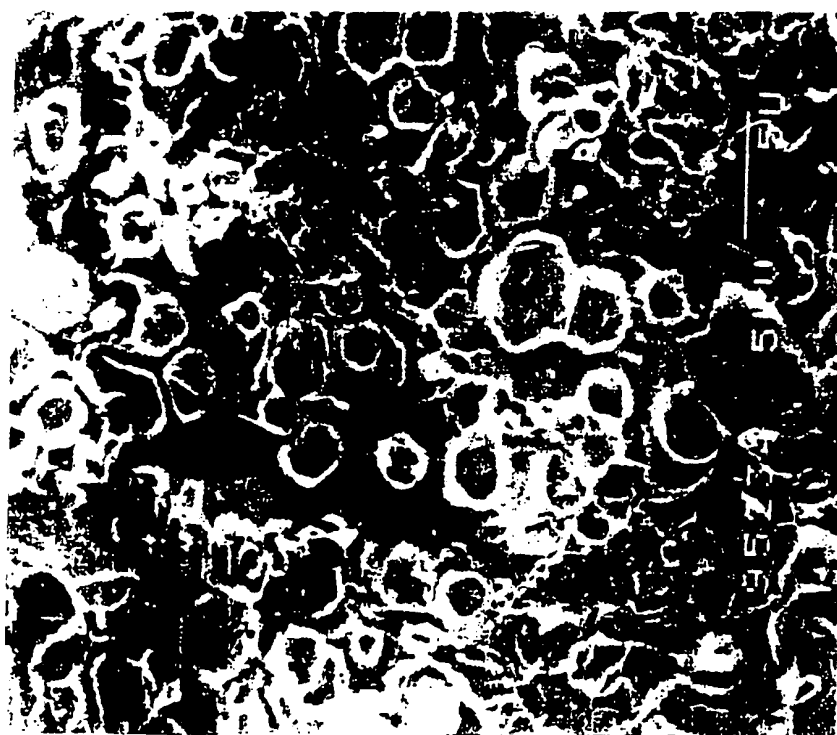


C o m p . e x . 1-1

FIG. 5

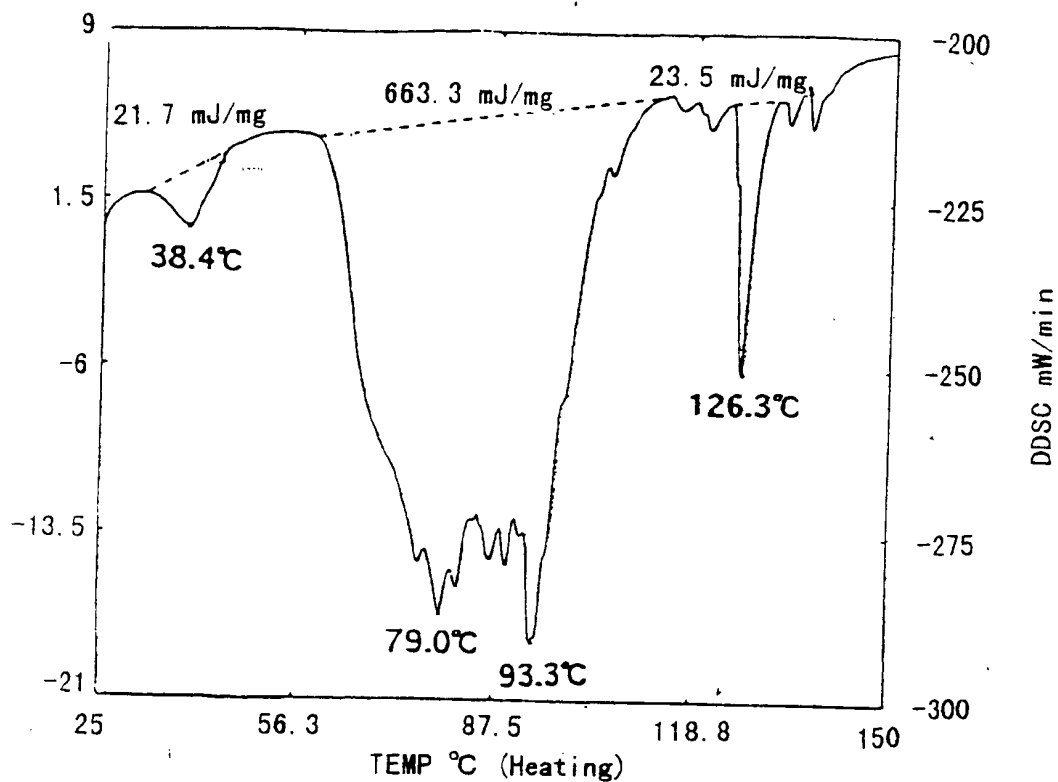

Example 1-1

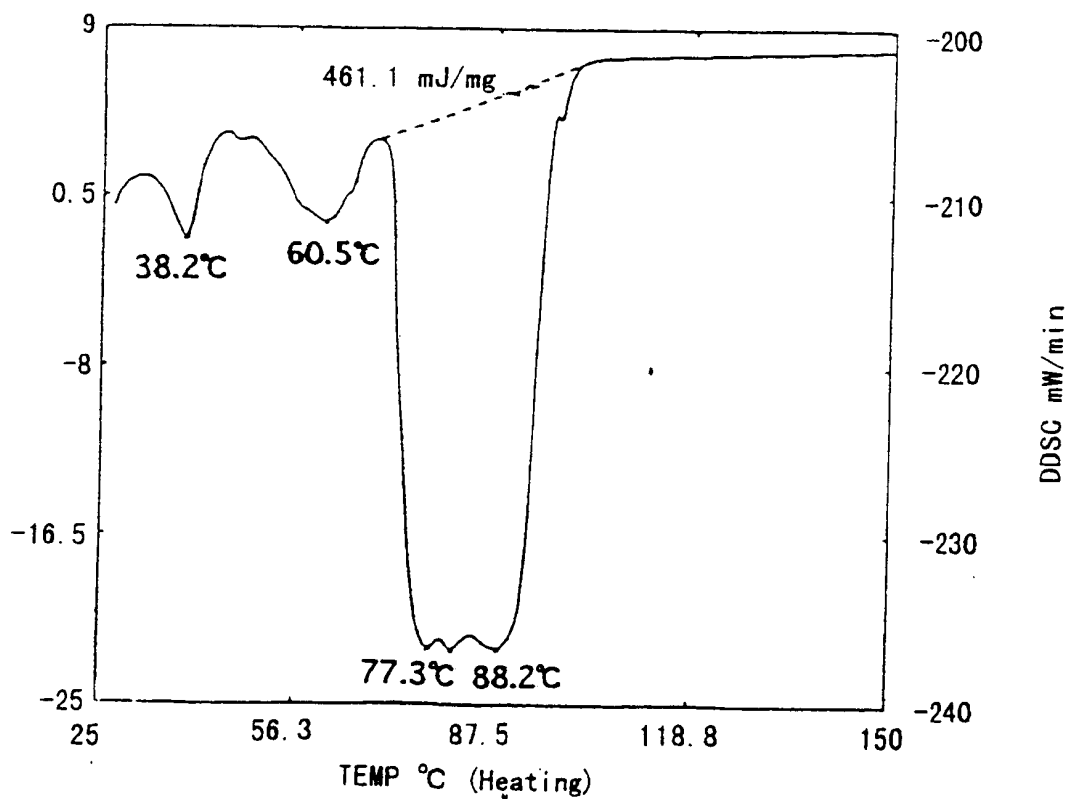

Comp. ex. 1-1

FIG. 6





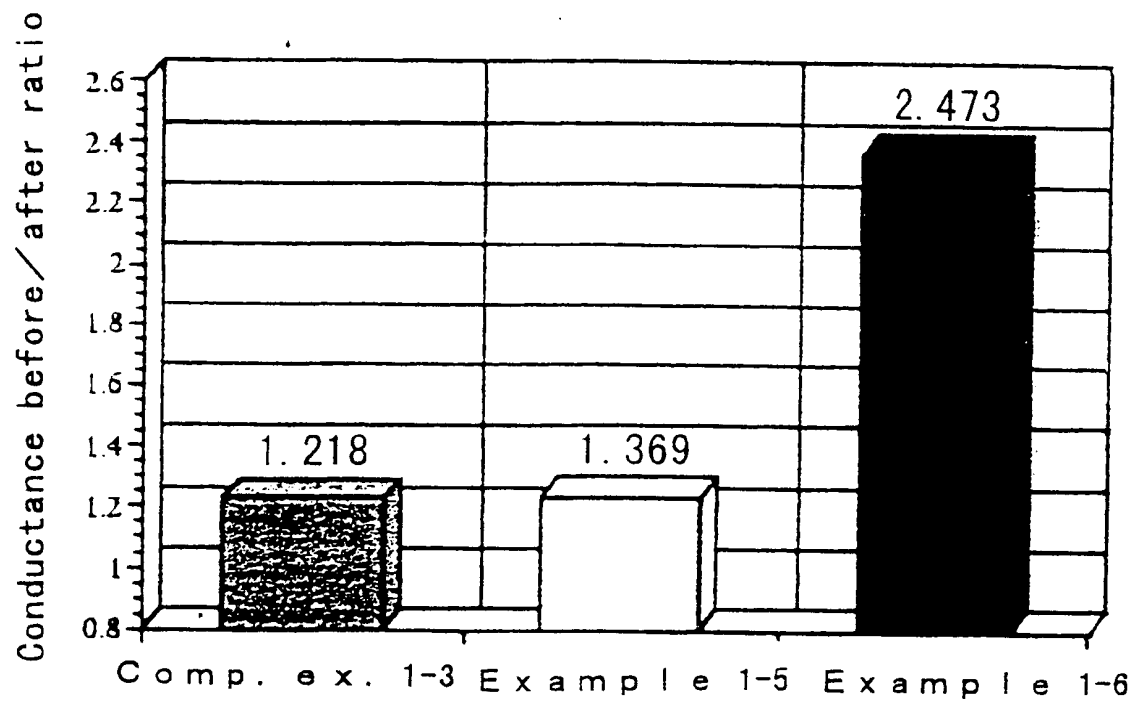


FIG. 7

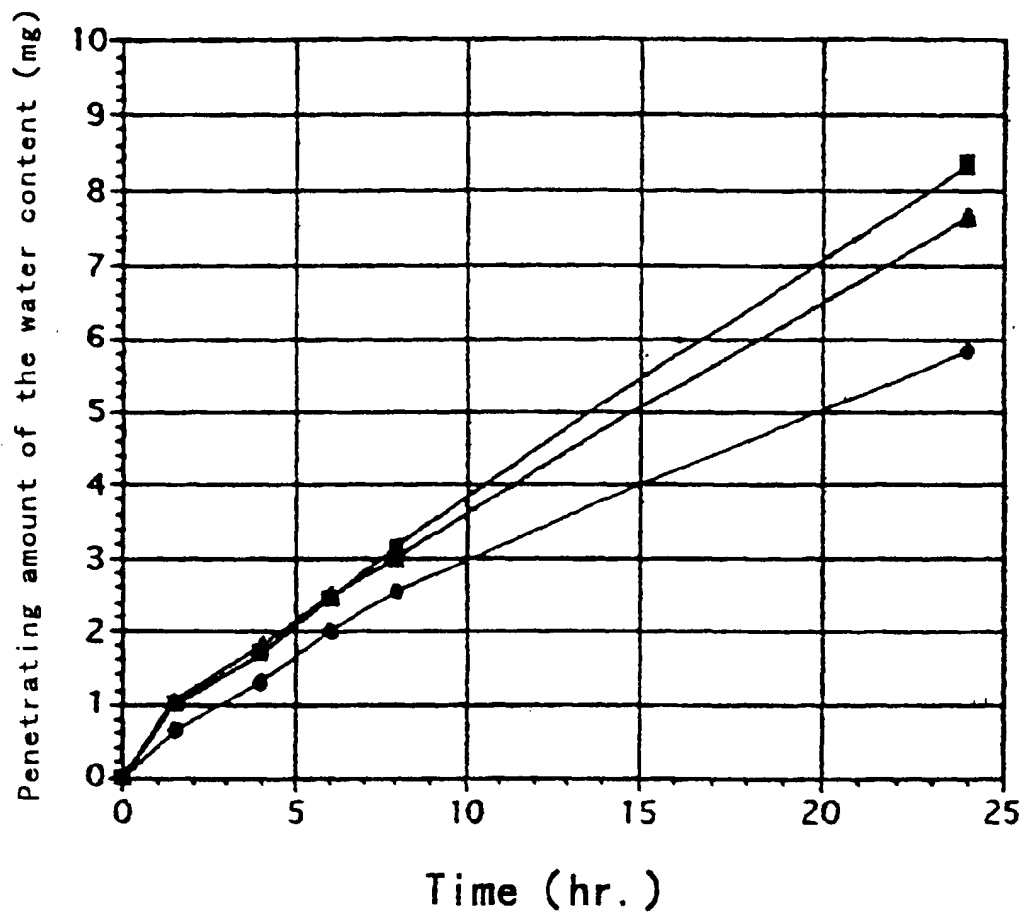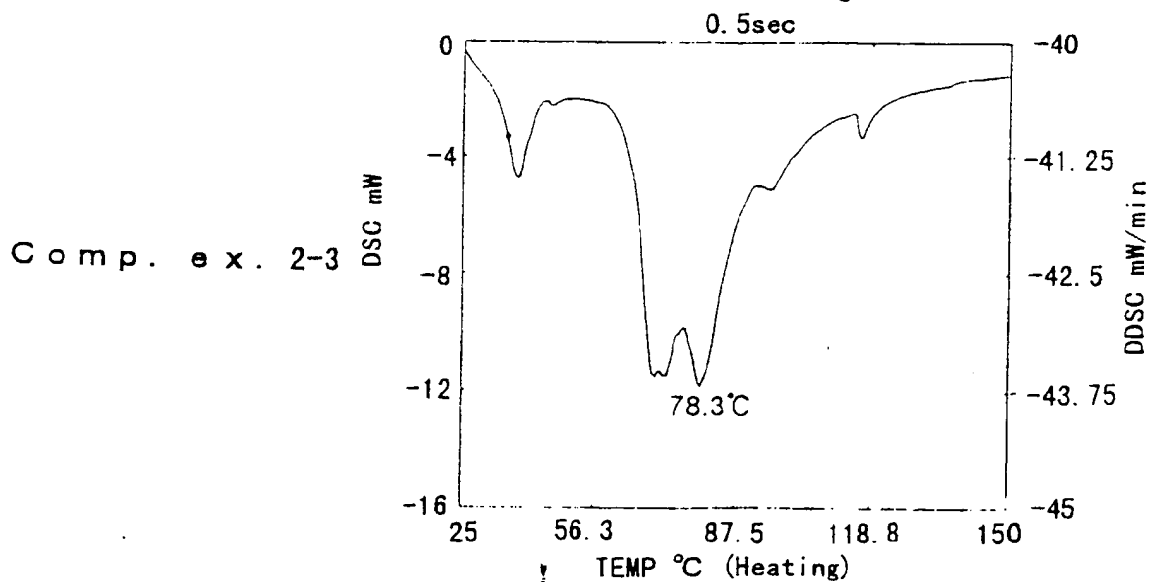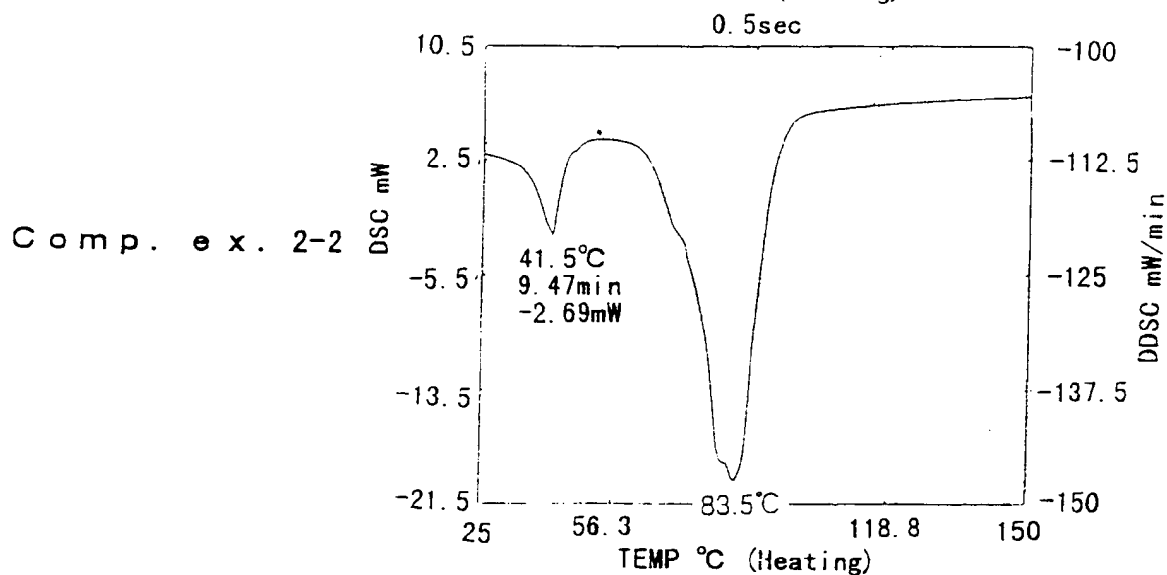


- ▲— Example 1-6
- Comp. ex. 1-3
- Comp. ex. 1-4

FIG. 8

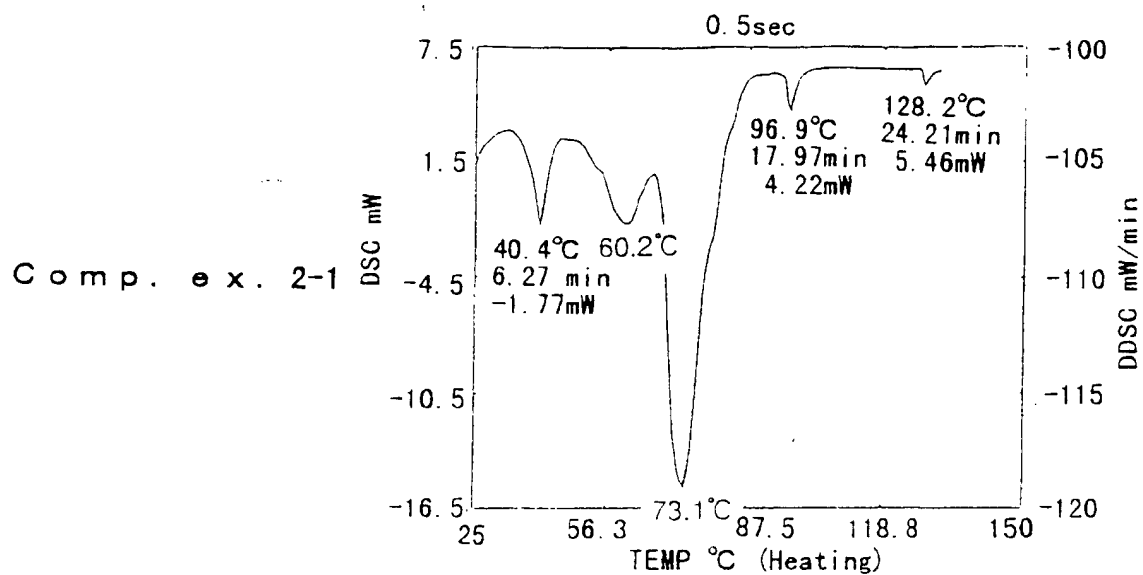

F I G. 9

Example 2-1

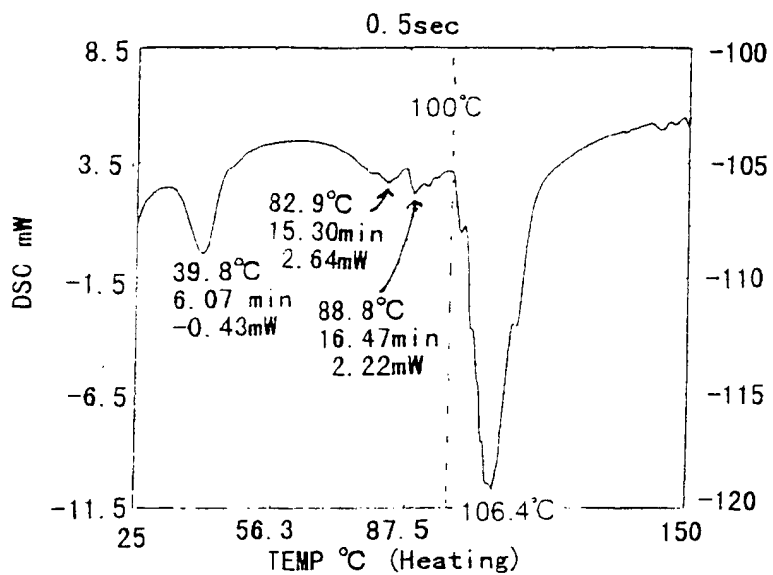

Example 2-2


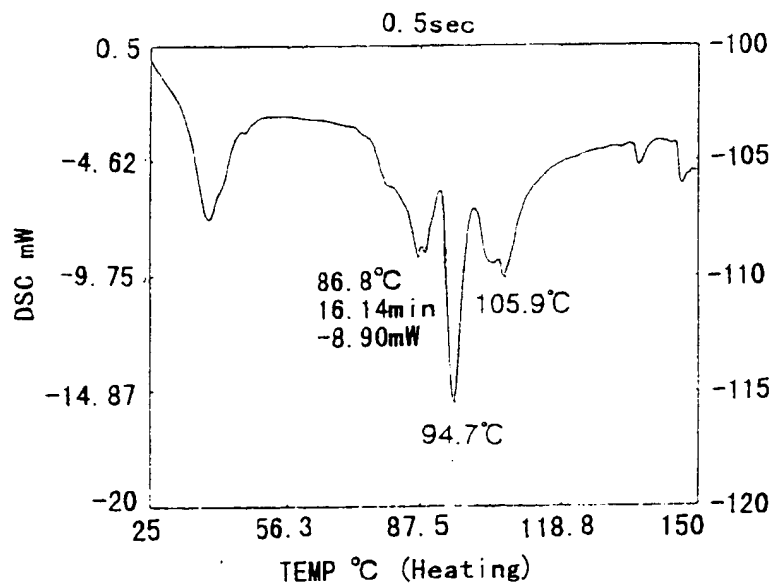


FIG. 10

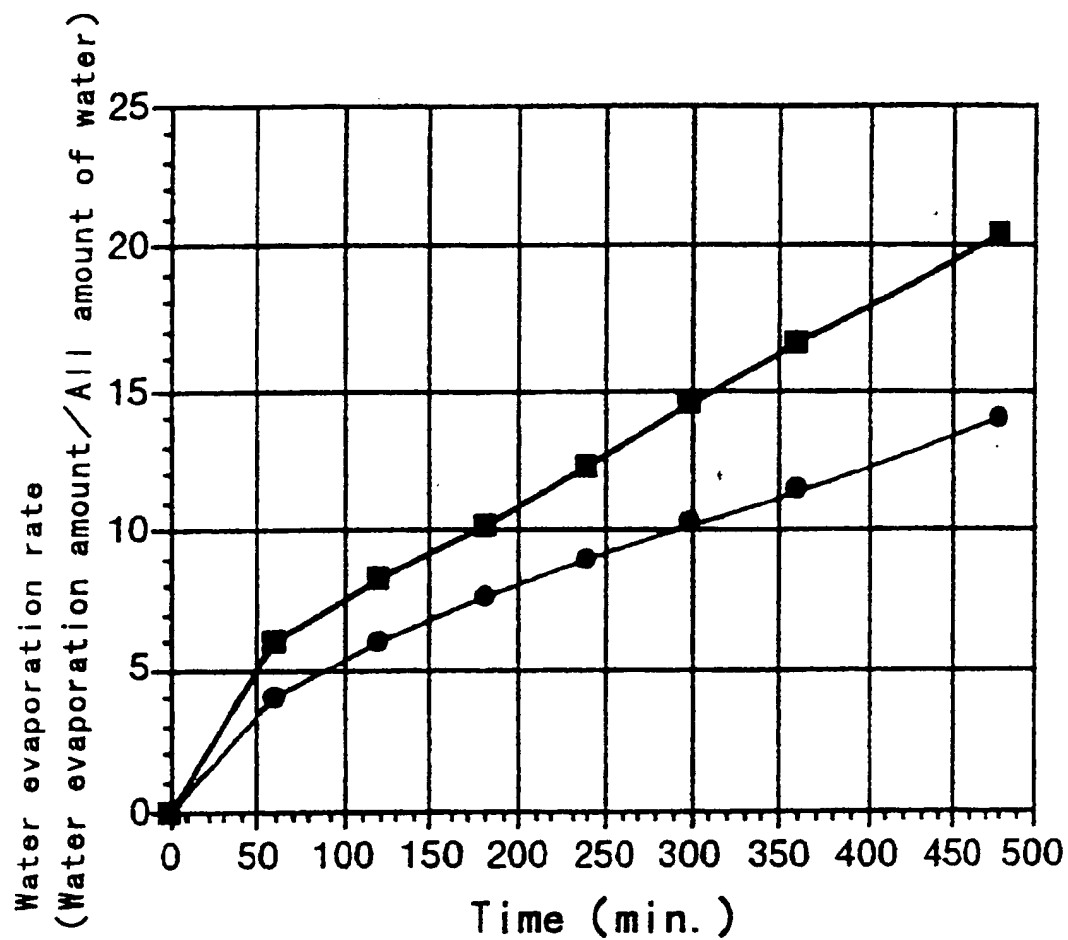

● Example 2-1

■ Example 2-2

F I G. 1 1




E x a m p l e 2-3 (x 300)



C o m p. e x. 2-5 (x 300)

FIG. 12

Example 2-3

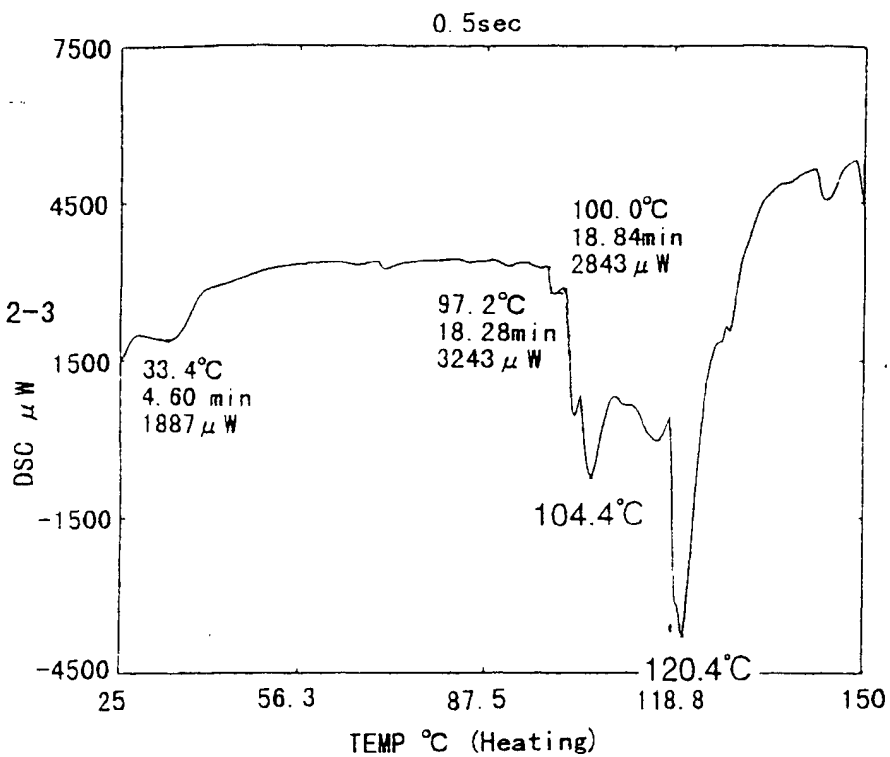

Comp. ex. 2-5

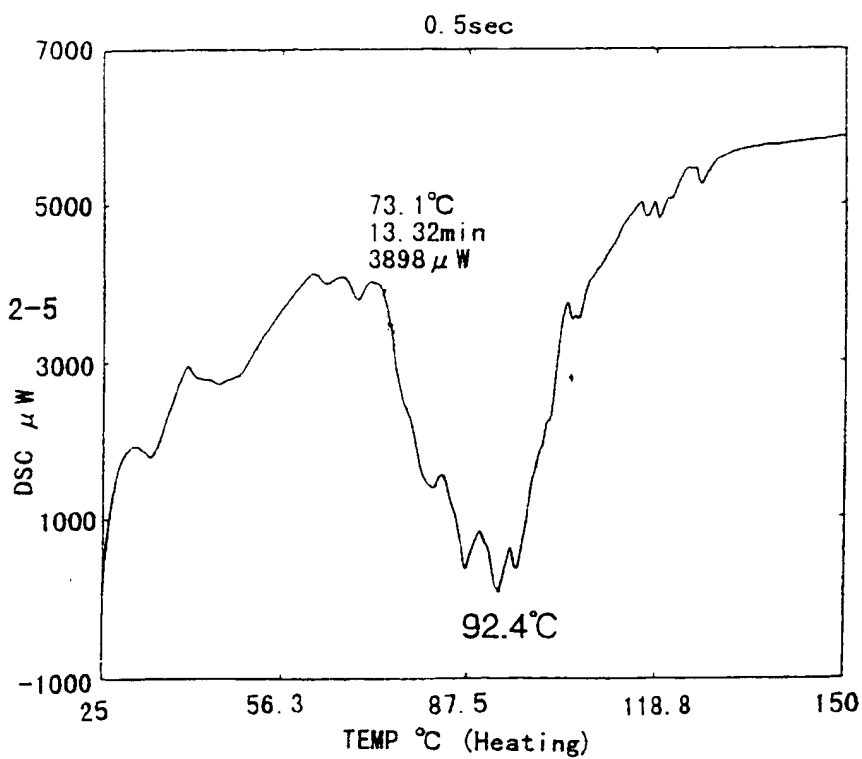


FIG. 13



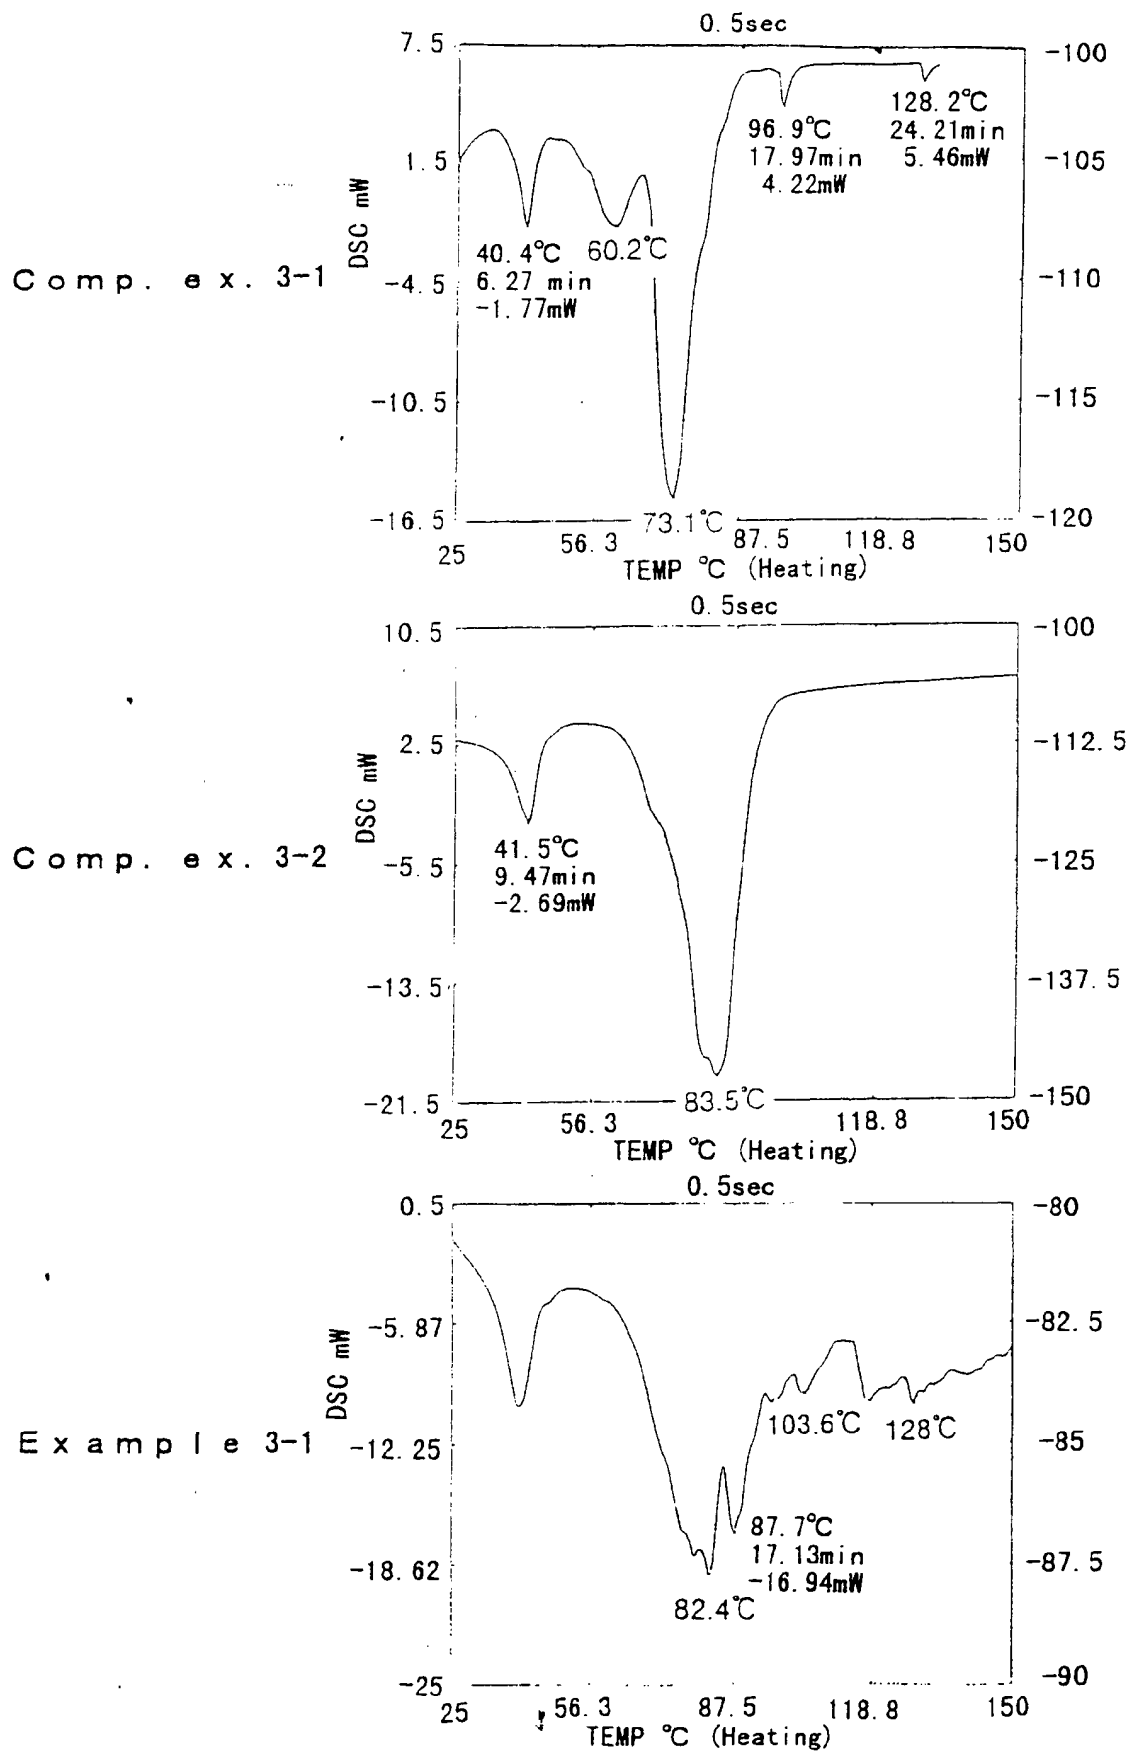



FIG. 14-1

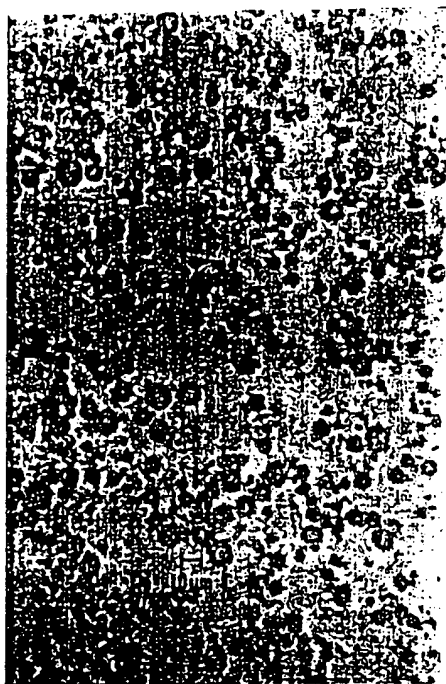

Example 3-34 (x300) 10 μ m

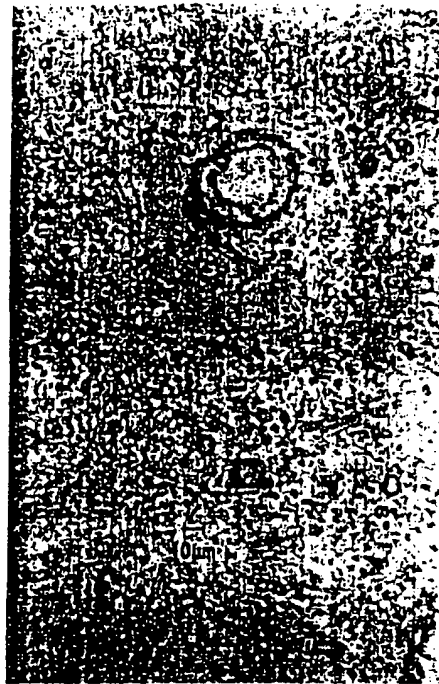

Example 3-36 (x300) 10 μ m

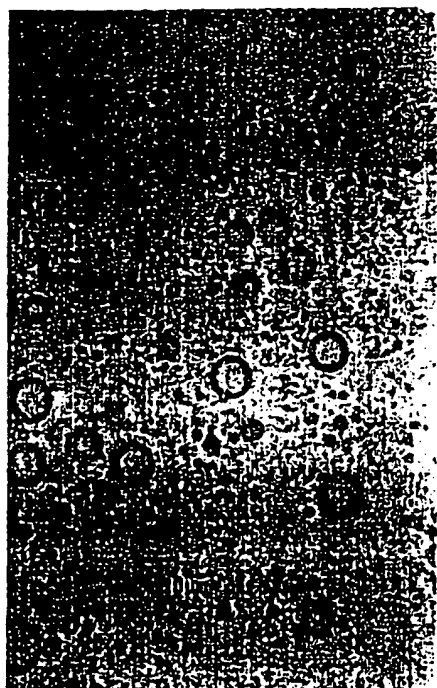

Example 3-33 (x300) 10 μ m



Example 3-35 (x300) 10 μ m

F I G. 1 4 - 2



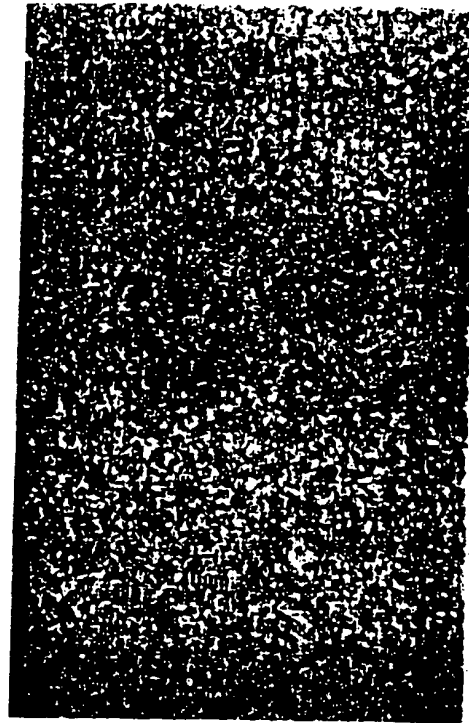
E x a m p l e 3-39 (x 300) 10 μ mE x a m p l e 3-37 (x 300) 10 μ m

FIG. 15

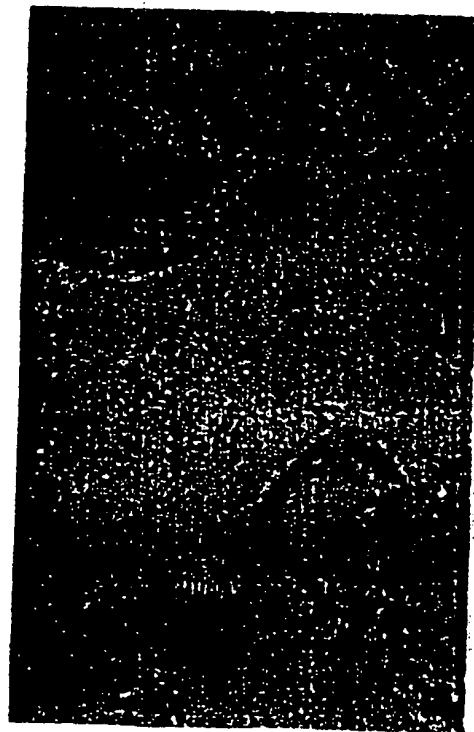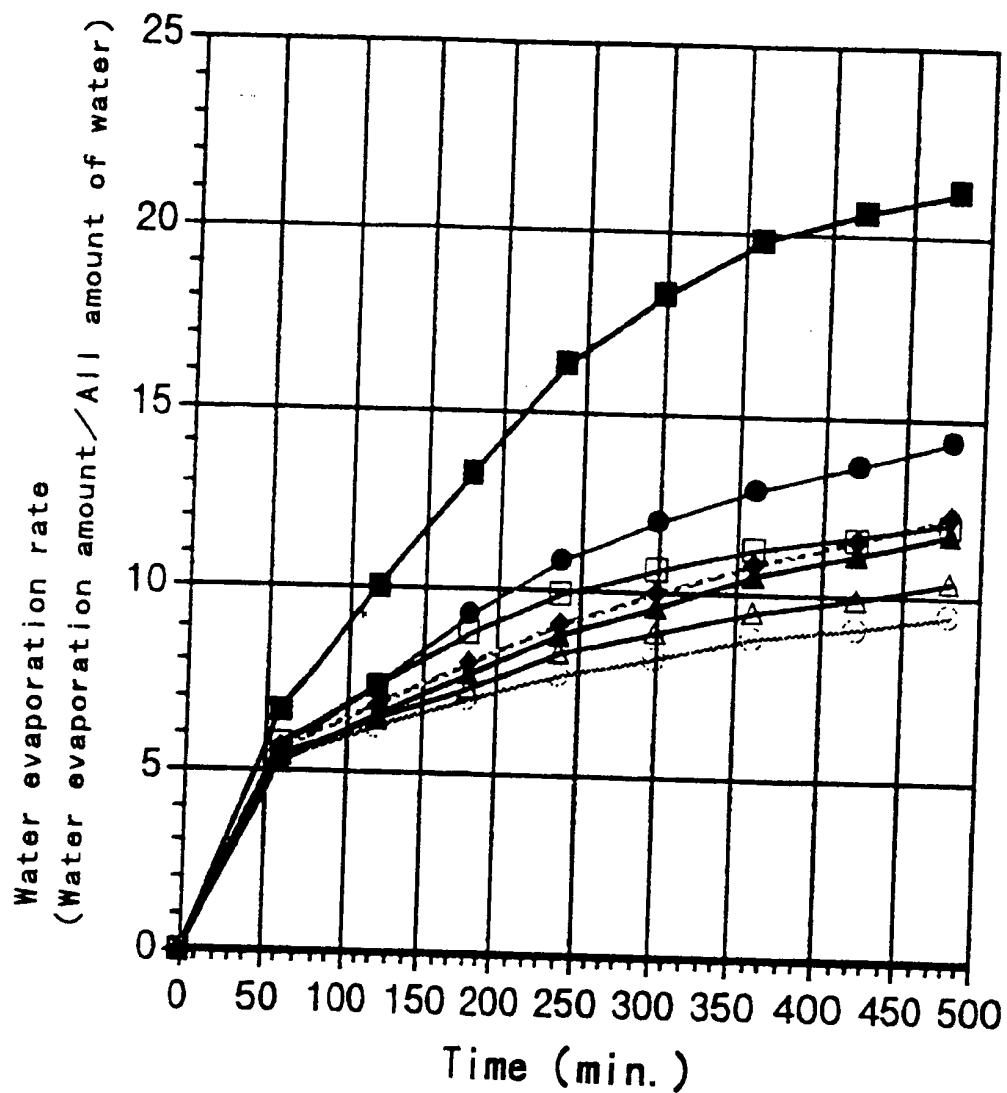

- Example 3-33
- Example 3-34
- ▲ Example 3-35
- ◆ Example 3-36
- Example 3-37
- Example 3-38
- △ Example 3-39

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP96/01815

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl⁶ A61K47/40

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int. Cl⁶ A61K47/40

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 58-58139, A (Nippon Surfactant K.K.), April 6, 1983 (06. 04. 83) (Family: none)	1 - 39
A	JP, 63-194726, A (Kao Corp.), August 11, 1988 (11. 08. 88) (Family: none)	1 - 39

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z" document member of the same patent family

Date of the actual completion of the international search

August 28, 1996 (28. 08. 96)

Date of mailing of the international search report

September 10, 1996 (10. 09. 96)

Name and mailing address of the ISA/

Japanese Patent Office

Facsimile No.

Authorized officer

Telephone No.